MON-BOL

Job Name: _____ Client Name: _____

Job Location: _____ Quote: _____

Type: _____ Quote Date: _____

AV POLES & LIGHTING
43827 Division St.
Lancaster, CA 93535
Toll Free: (844) 770-AVPL
Fax: (661) 945-2764
sales@avpltg.com
www.avpltg.com

MONTANA BOLLARD



DIMENSIONS

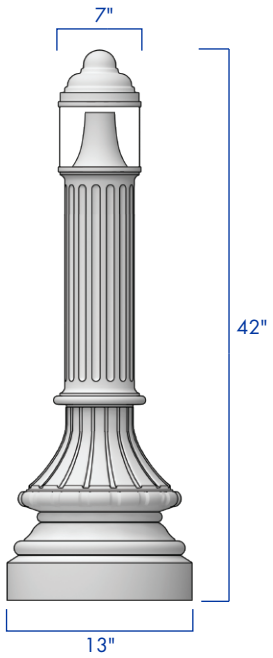

ANCHORAGE



Anchor Bolt
Bolt Projection
3.25" - 3.75"



Anchor Plate
13" Diameter
9" B.C.D.

DESCRIPTION

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The MON-BOL by AV Poles and Lighting is ideal for courtyards, pathways, and all low level lighting applications.

FEATURES

- Corrosion resistant cast aluminum construction
- Stainless steel hardware
- Acrylic injection molded lenses with smooth clear or opal finish.
- 0-10V dimmable driver
- 10-20KV surge protection
- IP67 rated modules - 5 year warranty
- Up to 180 Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- LED modules arranged in a Type V optic pattern for even light distribution.
- Anchor bolts are fabricated from hot-rolled carbon steel bar with minimum yield strength of 55,000 PSI. Bolts are fully galvanized and conform to ASTM-F1554 A55. Each bolt is furnished with two hex nuts and two flat washers.
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

SUITABLE FOR WET LOCATIONS

ORDERING INFORMATION

AVPL - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

BOLLARD	HEIGHT	WATTAGE	COLOR TEMP	VOLTAGE	OPTICS	FINISH	OPTIONS
MON-BOL	42"	18W 350mA	3000K WARM WHITE	120-277V VOLTAGE SENSING	DR 	DARK BRONZE	HOUSE-SIDE SHIELD
		26W 525mA	4000K NEUTRAL WHITE	347-480V VOLTAGE SENSING		BLACK	PHOTOCELL BUTTON
		36W 700mA	5000K COOL WHITE			WHITE	
		52W 1050mA			IL 	GREY	
						GREEN	
					WA* 		
					*APPLY LLF OF 10% TO LUMEN OUTPUT CHART	ALL RAL COLORS AVAILABLE	

LUMEN OUTPUT CHART

3K		18W 350mA	26W 525mA	36W 700mA	52W 1050mA
	Type V	2,462	3,349	4,348	5,865

4K		18W 350mA	26W 525mA	36W 700mA	52W 1050mA
	Type V	2,592	3,515	4,579	6,156

5K		18W 350mA	26W 525mA	36W 700mA	52W 1050mA
	Type V	2,617	3,550	4,624	6,217