


AVPL ENV-WM - Architectural Bell Wall Mount Luminaire

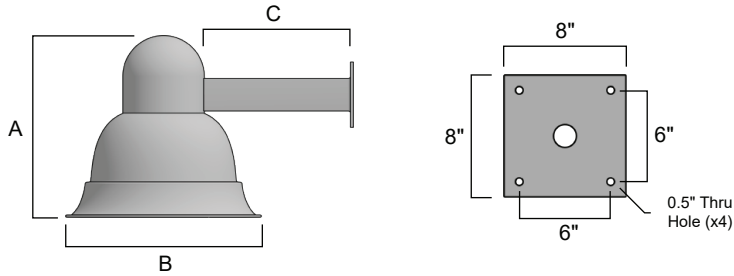

Description

Decorative architectural design provides a unique lighting solution for a variety of applications. The ENV series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

Features

Spun Aluminum construction, Stainless Steel hardware

IP68 rated modules - 5 year warranty

Up to 6500 lumens output per module




Low maintenance cost with lifetime >54,000 hrs

Multiple lighting distribution options with optical lens transmittance up to 98%

Multiple modules can easily be connected in series

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options																																																
<input type="checkbox"/> AVPL ENVSS1-WM <input type="checkbox"/> AVPL ENVSS2-WM	LED 36W 72W 108W 700mA <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 56W 112W 168W 1A <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <small>*Please call factory for alternate lamp options*</small> Lumen Output (4K) 1 Module 2 Module <table border="1"> <tr> <td></td> <td>36W 700mA</td> <td>56W 1A</td> <td>72W 700mA</td> <td>112W 1A</td> </tr> <tr> <td>Type III</td> <td>4,287</td> <td>6,432</td> <td>8,574</td> <td>12,864</td> </tr> <tr> <td>Type IV</td> <td>4,396</td> <td>6,217</td> <td>8,792</td> <td>12,434</td> </tr> <tr> <td>Type V</td> <td>4,533</td> <td>6,455</td> <td>9,066</td> <td>12,910</td> </tr> </table> 3 Module <table border="1"> <tr> <td></td> <td>108W 700mA</td> <td>168W 1A</td> <td></td> </tr> <tr> <td>Type III</td> <td>12,861</td> <td>19,296</td> <td></td> </tr> <tr> <td>Type IV</td> <td>13,188</td> <td>18,651</td> <td></td> </tr> <tr> <td>Type V</td> <td>13,599</td> <td>19,365</td> <td></td> </tr> </table> Color Temp 3000K Warm <input type="checkbox"/> 4000K Neutral <input type="checkbox"/> 5000K Cool <input type="checkbox"/>		36W 700mA	56W 1A	72W 700mA	112W 1A	Type III	4,287	6,432	8,574	12,864	Type IV	4,396	6,217	8,792	12,434	Type V	4,533	6,455	9,066	12,910		108W 700mA	168W 1A		Type III	12,861	19,296		Type IV	13,188	18,651		Type V	13,599	19,365		120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> MT <input type="checkbox"/> 120-277 Voltage Sensing <input type="checkbox"/>	Wall Mount..... <input type="checkbox"/> Dimensions <table border="1"> <tr> <td></td> <td>ENV1 WM</td> <td>ENV2 WM</td> </tr> <tr> <td>A</td> <td>23"</td> <td>21"</td> </tr> <tr> <td>B</td> <td>24"</td> <td>20"</td> </tr> <tr> <td>C</td> <td>24"</td> <td>18"</td> </tr> </table> <small>*72/112W MAX*</small>		ENV1 WM	ENV2 WM	A	23"	21"	B	24"	20"	C	24"	18"	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green	Optical <input type="checkbox"/> House Side Shield Electrical <input type="checkbox"/> 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor
	36W 700mA	56W 1A	72W 700mA	112W 1A																																																	
Type III	4,287	6,432	8,574	12,864																																																	
Type IV	4,396	6,217	8,792	12,434																																																	
Type V	4,533	6,455	9,066	12,910																																																	
	108W 700mA	168W 1A																																																			
Type III	12,861	19,296																																																			
Type IV	13,188	18,651																																																			
Type V	13,599	19,365																																																			
	ENV1 WM	ENV2 WM																																																			
A	23"	21"																																																			
B	24"	20"																																																			
C	24"	18"																																																			
<input type="checkbox"/> Type III  <input type="checkbox"/> Type IV  <input type="checkbox"/> Type V 																																																					

= LED Only