

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_ Quote: \_\_\_\_\_  
Client Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quote Date: \_\_\_\_\_

### DESCRIPTION

This versatile arm is suited for traditional and contemporary fixtures. The PY-PM-S arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

### FEATURES


Pendant Mount standard fixture mounting.

Cast aluminum construction.

Angled riser fabricated from 2.375" O.D. T6061 extruded aluminum pipe.



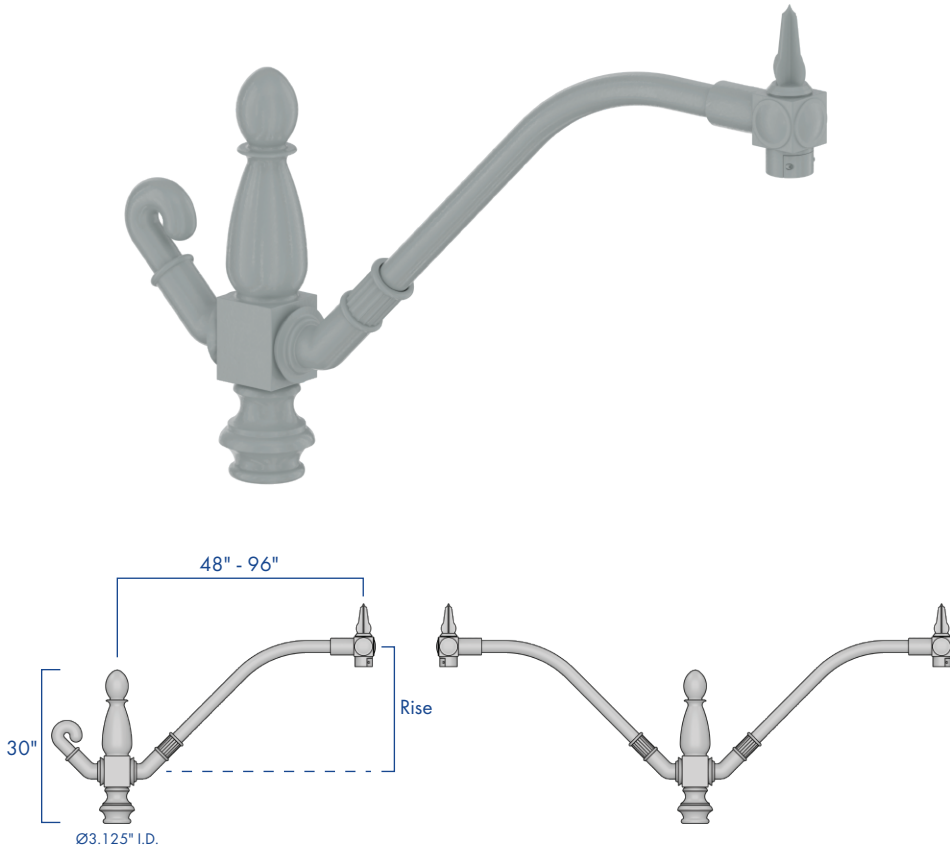


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



## ORDERING INFORMATION

AVPL -

| ARM                               | ARM LENGTH/RISE       | MOUNTING   | FINISH                      |
|-----------------------------------|-----------------------|--|-----------------------------|
| PY-PM-S                           | 48" Length - 24" Rise | 1-90.....   | DARK BRONZE                 |
|                                   | 72" Length - 36" Rise | 2-90.....   | BLACK                       |
|                                   | 96" Length - 48" Rise | 2-180.....  | WHITE                       |
|                                   |                       | 3-90.....   | GREY                        |
|                                   |                       | 4-90.....   | GREEN                       |
| CONTACT<br>FACTORY FOR<br>OPTIONS |                       |  | ALL RAL COLORS<br>AVAILABLE |