SS-PT

S-SCROLL POST TOP ARM


POLES & LIGHTING

Job Name: _____ Location: _____ Quote: _____

Client Name: _____ Type: _____ Quote Date: _____

AV POLES & LIGHTING
43827 Division St.
Lancaster, CA 93535
Toll Free: (844) 770-AVPL
Fax: (661) 945-2764
sales@avpltg.com
www.avpltg.com



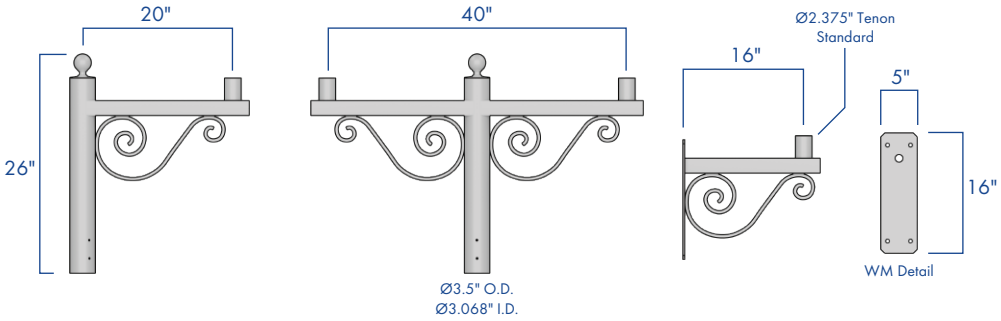

DESCRIPTION

This versatile arm is suited for traditional and contemporary fixtures. The SS-PT arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

FEATURES

PT23 (Ø2.375" O.D. x 4" Tenon) standard fixture mounting.

Decorative cast aluminum and extruded aluminum pole or wall bracket mounting.

Mounts to 2⅜" or 2⅞" O.D. tenon.

Extruded aluminum, Schedule 40 wall thickness.

6061 alloy T-6 temper with cast aluminum slip fitter.

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

ORDERING INFORMATION

AVPL - _____ - _____ - _____

ARM	MOUNTING	FINISH
SS-PT	1-90	DARK BRONZE
	2-90	BLACK
	2-180	WHITE
	3-90	GREY
	4-90	GREEN
	WALL MOUNT	

ALL RAL COLORS AVAILABLE