# PAS

## PASADENA 1 PIECE BASE


AV POLES & LIGHTING
43827 Division St.
Lancaster, CA 93535
Toll Free: (844) 770-AVPL
Fax: (661) 945-2764
sales@avpltg.com
www.avpltg.com

POLES & LIGHTING


Job Name: _____ Location: _____ Quote: _____

Client Name: _____ Type: _____ Quote Date: _____






**PAS Template**
22" (On Flats) x 0.75" Anchor Plate
14" DIA. Bolt Circle




**Anchor Bolts**
0.75" x 24" x 3" Anchor Bolts
2.5" - 3" Projection

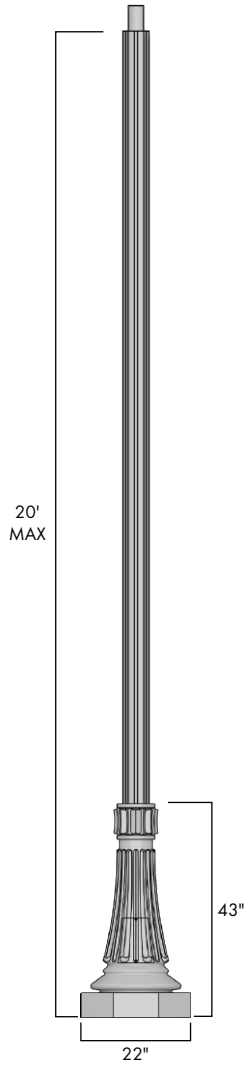


## DESCRIPTION

The PAS base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

## FEATURES

Welds to 5" to 7.5" O.D. smooth or fluted round aluminum shafts.

One piece corrosion resistant cast aluminum construction with minimum wall thickness of 0.375"

Hand hole fabricated into base.

Stainless steel hardware.

Anchor bolts are fabricated from hot-rolled carbon steel bar with minimum yield strength of 55,000 PSI. Bolts are fully galvanized and conform to ASTM-F1554 A55. Each bolt is furnished with two hex nuts and two flat washers.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

MADE IN USA

SUITABLE FOR **WET LOCATIONS**

# ORDERING INFORMATION

AVPL - _____ - _____ - _____ - _____ - _____ - _____ - _____

| BASE | SHAFT | HEIGHT | SHAFT WALL | MOUNTING | FINISH | ACCESSORIES |
|---|---|---|---|---|---|---|
| PAS | 5S<br>Ø5" SMOOTH | 10' | 0.125"<br>STANDARD WALL | PT23<br>Ø2.375" TENON | DARK BRONZE | GFI<br>with IN-USE COVER |
| | 5F<br>Ø5" FLUTED | 12' | 0.188"<br>HEAVY WALL | PT27<br>Ø2.875" TENON | BLACK | BEB<br>BANNER EYE BOLT |
| | 6S<br>Ø6" SMOOTH | 14' | | PT30<br>Ø3" TENON | WHITE | CPLN<br>THREADED COUPLING |
| | 6F<br>Ø6" FLUTED | 16' | | POLE<br>DRILLING | GREY | BA<br>BANNER ARMS |
| | 7S<br>Ø7" SMOOTH | 18' | | | GREEN | BH<br>BASKET HOLDERS |
| | 7F<br>Ø7" FLUTED | 20' | | | | FH<br>FLAG HOLDERS |
| | 7.5S<br>Ø7.5" SMOOTH | | | | | |
| | 7.5F<br>Ø7.5" FLUTED | CONTACT FACTORY FOR HEIGHT OPTIONS | | CONTACT FACTORY FOR DRILLING OPTIONS | ALL RAL COLORS AVAILABLE | CONTACT FACTORY FOR DETAILS |