


BOARDWALK SERIES



DIMENSIONS

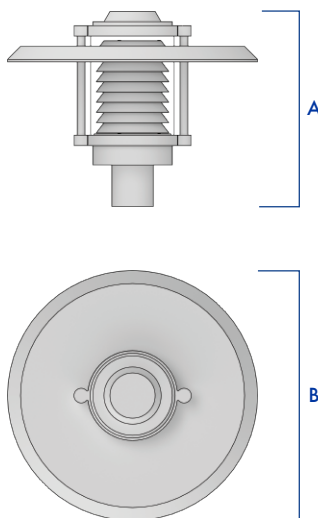

FIXTURE	A	B
BW	19"	22"

DESCRIPTION

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The BW by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

FEATURES

- Spun aluminum reflector, cast aluminum body and fitter
- Stainless steel hardware
- 0-10V dimmable driver
- 10-20KV surge protection
- IP67 rated modules - 5 year warranty
- Up to 180 Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- LED modules arranged in a Type V optic pattern for even light distribution.
- Lens available in acrylic or polycarbonate construction with opal or clear smooth finish.
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



ORDERING INFORMATION

AVPL -

LUMINAIRE	WATTAGE	COLOR TEMP	VOLTAGE	LENS	REFLECTOR	MOUNTING	FINISH	OPTIONS
BW	40W 350mA	3000K WARM WHITE	120-277V VOLTAGE SENSING	CSA CLEAR SMOOTH ACRYLIC	AR ANGLED	PT23 Ø2.375" TENON	DARK BRONZE	LOUVERS INTERNAL
	58W 525mA	4000K NEUTRAL WHITE	347-480V VOLTAGE SENSING	CSP CLEAR SMOOTH POLYCARBONATE	FR FLAT	PT27 Ø2.875" TENON	BLACK	HOUSE-SIDE SHIELD
	80W 700mA	5000K COOL WHITE		OSA* OPAL SMOOTH ACRYLIC OSP* OPAL SMOOTH POLYCARBONATE		PT30 Ø3" TENON	WHITE GREY GREEN	PHOTOCELL BUTTON
				* APPLY ILL OF 10% TO LUMEN OUTPUT CHART		CONTACT FACTORY FOR OTHER SIZES	ALL RAL COLORS AVAILABLE	

LUMEN OUTPUT CHART

3K		40W	58W	80W	116W	4K		40W	58W	80W	116W	5K		40W	58W	80W	116W
	Type V	5,472	7,470	9,664	13,084		Type V	5,760	7,841	10,176	13,827		Type V	5,817	7,919	10,277	13,965