



POLES & LIGHTING

SS-PT

S-SCROLL POST TOP ARM

AV POLES & LIGHTING
43827 Division St.
Lancaster, CA 93535
Toll Free: (844) 770-AVPL
Fax: (661) 945-2764
sales@avpltg.com
www.avpltg.com

Job Name: _____

Location: _____

Quote: _____

Client Name: _____

Type: _____

Quote Date: _____

DESCRIPTION

This versatile arm is suited for traditional and contemporary fixtures. The SS-PT arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

FEATURES

PT23 (Ø2.375" O.D. x 4" Tenon) standard fixture mounting.

Decorative cast aluminum and extruded aluminum pole or wall bracket mounting.


Mounts to 2 3/8" or 2 7/8" O.D. tenon.

Extruded aluminum, Schedule 40 wall thickness.

6061 alloy T-6 temper with cast aluminum slip fitter.

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

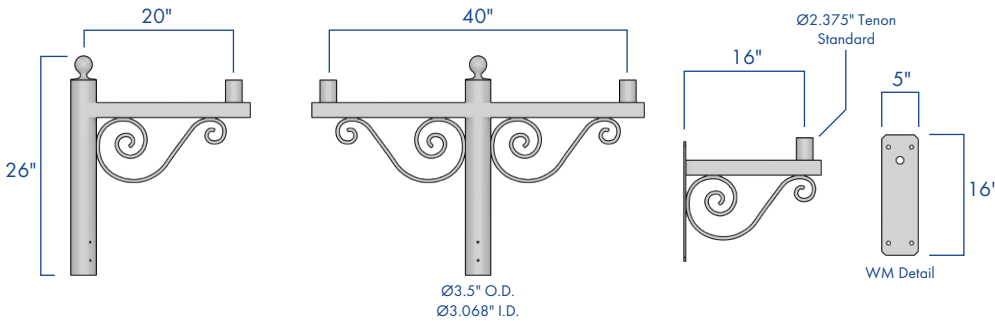

ORDERING INFORMATION

AVPL -

ARM	MOUNTING	FINISH
SS-PT	1-90.....	DARK BRONZE
	2-90.....	BLACK
	2-180.....	WHITE
	3-90.....	GREY
	4-90.....	GREEN
	WALL MOUNT.....	

ALL RAL COLORS
AVAILABLE