LAC-RD

LACROSSE 1 PIECE BASE (ROUND OPENING)


POLES & LIGHTING

Job Name: _____ Location: _____ Quote: _____


Client Name: _____ Type: _____ Quote Date: _____

AV POLES & LIGHTING
43827 Division St.
Lancaster, CA 93535
Toll Free: (844) 770-AVPL
Fax: (661) 945-2764
sales@avpltg.com
www.avpltg.com






LAC Template
12" x 12" x 0.75" Anchor Plate
11" DIA. Bolt Circle



Anchor Bolts
0.75" x 24" x 3" Anchor Bolts
2.5" - 3" Projection

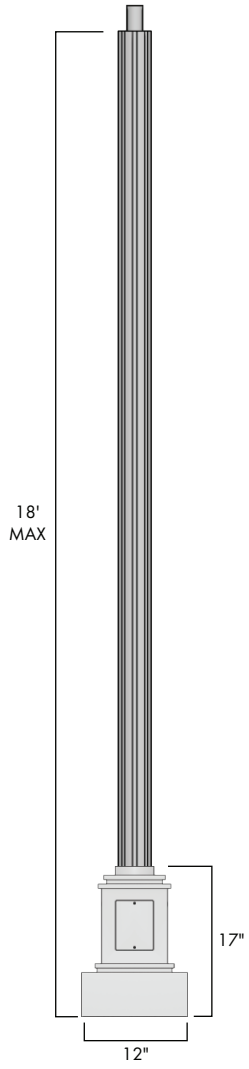

DESCRIPTION

The LAC-RD base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

FEATURES

Welds to 3" or 4" O.D. smooth or fluted round aluminum shafts.

One piece corrosion resistant cast aluminum construction with minimum wall thickness of 0.375"

Hand hole fabricated into base.

Stainless steel hardware.

Anchor bolts are fabricated from hot-rolled carbon steel bar with minimum yield strength of 55,000 PSI. Bolts are fully galvanized and conform to ASTM-F1554 A55. Each bolt is furnished with two hex nuts and two flat washers.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

MADE IN USA

SUITABLE FOR **WET LOCATIONS**

ORDERING INFORMATION

AVPL - _____ - _____ - _____ - _____ - _____ - _____ - _____

BASE	SHAFT	HEIGHT	SHAFT WALL	MOUNTING	FINISH	ACCESSORIES
LAC-RD	3S Ø3" SMOOTH	10'	0.125" STANDARD WALL	PT23 Ø2.375" TENON	DARK BRONZE	GFI with IN-USE COVER
	3F Ø3" FLUTED	12'	0.188" HEAVY WALL (REQUIRED FOR 16'-18')	PT27 Ø2.875" TENON	BLACK	BEB BANNER EYE BOLT
	4S Ø4" SMOOTH	14'		PT30 Ø3" TENON	WHITE	CPLN THREADED COUPLING
	4F Ø4" FLUTED	16'		POLE DRILLING	GREY	BA BANNER ARMS
		18'			GREEN	BH BASKET HOLDERS
						FH FLAG HOLDERS
		CONTACT FACTORY FOR HEIGHT OPTIONS		CONTACT FACTORY FOR DRILLING OPTIONS	ALL **RAL** COLORS AVAILABLE	CONTACT FACTORY FOR DETAILS