

15 SERIES - LED SLIM FULL CUTOFF WALL PACK

The MWP15 SERIES - LED Slim Full Cutoff Wall Pack, up to 150 lm/W, IP65 Wet Location, Non-Dimmable and 1-10V, Premium Outdoor Luminaire.

FEATURES

Lumen Output	3900 to 19980 lumens
Efficacy	Up to 150 lm/W
Input Voltage	120-277V
Dimmable	No and 0-10V
CCT	4000K, 5000K, Select (3000K, 4000K, 5000K)
IP Rating	IP65 Wet Location
Warranty	5 Years

Applications

Premium outdoor luminaire suitable for building exteriors, entryways, courtyards, alleys, pedestrian walkways, and general security.

Construction

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. 3G vibration testing prescribed by ANSI C136.31 stds. IP65 Wet Location rated for dust-tight, water jets: IEC 60529.

Electrical

Input voltage 120-277V non-dimmable and 1-10V models. Operating temperatures -40°F to 104°F (-40°C to 40°C).

Mounting

Wall mounted installation.

Optics

Anti-UV clear ridged polycarbonate lens.

Controls

Fixture Integrated PIR photocell sensor available.

Emergency

Fixture integrated 90 minute Emergency Battery Backup available.

Listings

UL certified to meet US and Canadian standards. FCC and RoHS compliant. Listed to qualify for energy-efficient LED lighting rebates.

Warranty

5 yr /50K hrs.





Correlated Color Temperatures (CCT)

3000K

4000K

5000K



SPECIFICATIONS

Energy Data

Input Voltage:	120-277V
Input Frequency:	50/60 Hz
Wattage:	26W, 38W, 65W, 100W, 135W
Power Factor:	>0.9
Total Harmonic Distortion:	<20%
Operating Temperature:	-40°F to 104°F (-40°C to 40°C)

Lighting Data


Lumens:	3900, 5700, 9685, 15000, 19980
Lumens Per Watt:	Up to 150 lm/W
Color Correlated Temperature (CCT):	3000K, 4000K, 5000K
Dimmable:	No and 0-10V Models
Color Rendering Index (CRI):	>70
L70:	50000 hours

PHYSICAL DIMENSIONS

All Models
13.1"L x 9.6"W x 3.8"D


L

W



D

PHOTOMETRICS

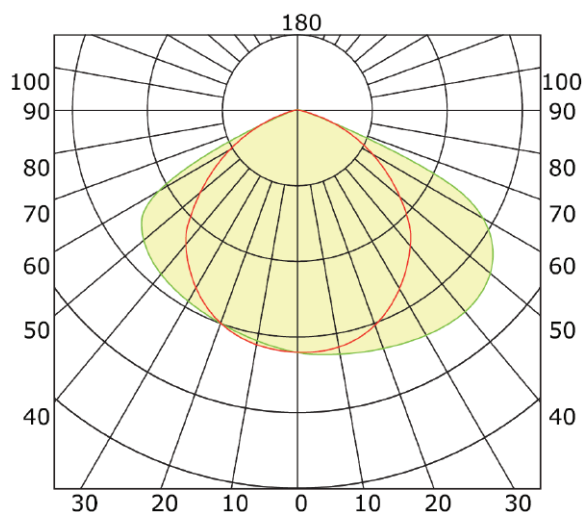

ORDERING INFORMATION

AVPL -						
LUMINAIRE	DIMMING	WATTAGE	COLOR TEMP	VOLTAGE	FINISH	OPTIONS
MWP15	1-10V	26W 38W	3000K WARM WHITE	120-277V VOLTAGE SENSING	DARK BRONZE	PHOTOCELL BUTTON
MWP15-3CCT		*65W 100W	4000K NEUTRAL WHITE			
		135W	5000K COOL WHITE			
			*3K/4K/5K SELECTABLE			
	MWP15-3CCT ONLY	*MWP15-3CCT 65W ONLY	*MWP15-3CCT ONLY			

