LAC-RD-SB


LACROSSE 2 PIECE BASE (ROUND OPENING)


POLES & LIGHTING


Job Name: _____ Location: _____ Quote: _____

Client Name: _____ Type: _____ Quote Date: _____

AV POLES & LIGHTING
43827 Division St.
Lancaster, CA 93535
Toll Free: (844) 770-AVPL
Fax: (661) 945-2764
sales@avpltg.com
www.avpltg.com

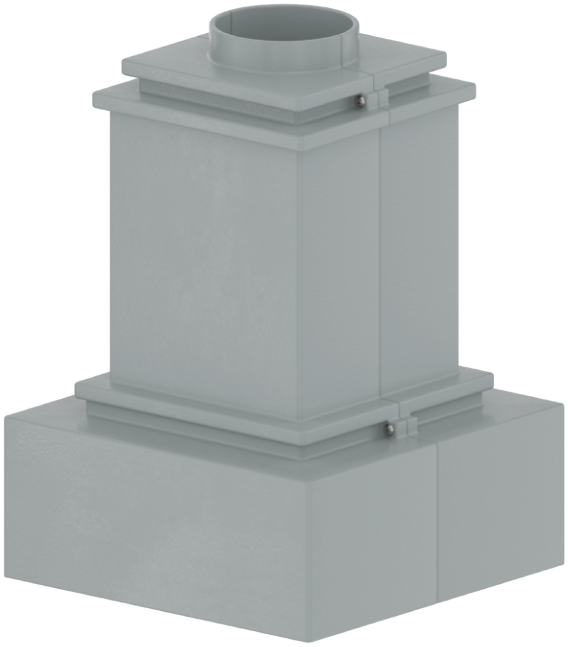

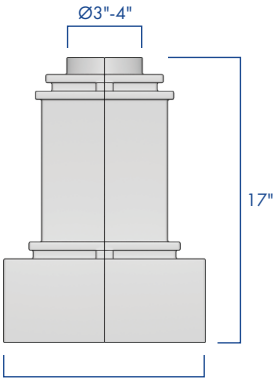

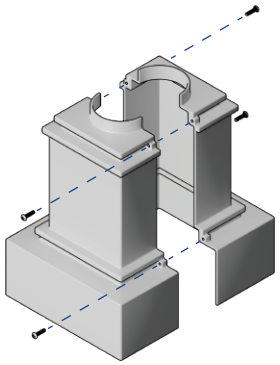

DESCRIPTION

The LAC-RD split base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

FEATURES

Clamps around 3" and 4" O.D. smooth or fluted round steel or aluminum shafts.

Two piece corrosion resistant cast aluminum construction with minimum wall thickness of 0.250"

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

SUITABLE FOR WET LOCATIONS

ORDERING INFORMATION

AVPL - _____ - _____ - _____

BASE	SHAFT OPENING	FINISH
LAC-RD-SB	Ø3" ROUND SHAFT	DARK BRONZE
	Ø4" ROUND SHAFT	BLACK
		WHITE
		GREY
		GREEN

ALL RAL COLORS AVAILABLE