




PASADENA BASE (1 PIECE)



20'
MAX

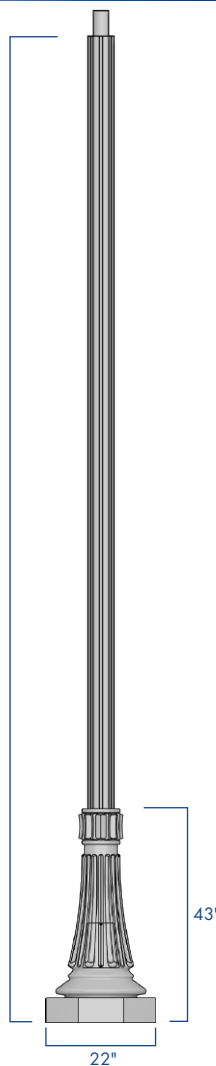

DESCRIPTION

The PAS base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

FEATURES

Welds to 5" to 7.5" O.D. smooth or fluted round aluminum shafts.

One piece corrosion resistant cast aluminum construction with minimum wall thickness of .375"

Hand hole fabricated into base.

Stainless steel hardware.

Anchor bolts are fabricated from hot-rolled carbon steel bar with minimum yield strength of 55,000 PSI. Bolts are fully galvanized and conform to ASTM-F1554 A55. Each bolt is furnished with two hex nuts and two flat washers.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



SUITABLE FOR
WET
LOCATIONS

ORDERING INFORMATION

AVPL -

BASE	SHAFT	HEIGHT	SHAFT WALL	MOUNTING	FINISH	ACCESSORIES
PAS	5S Ø5" SMOOTH	10'	.125"	PT23 Ø2.375" TENON	DARK BRONZE	GFI with IN-USE COVER
	5F Ø5" FLUTED	12'	.188"	PT27 Ø2.875" TENON	BLACK	BEB BANNER EYE BOLT
	6S Ø6" SMOOTH	14'		POLE DRILLING	WHITE	CPLN THREADED COUPLING
	6F Ø6" FLUTED	16'			GREY	BA BANNER ARMS
	7S Ø7" SMOOTH	18'			GREEN	BH BASKET HOLDERS
	7F Ø7" FLUTED	20' Ø5" SHAFT				FH FLAG HOLDERS
	7.5S Ø7.5" SMOOTH					
	7.5F Ø7.5" FLUTED					
		CONTACT FACTORY FOR HEIGHT OPTIONS		CONTACT FACTORY FOR DRILLING OPTIONS	ALL RAL COLORS AVAILABLE	CONTACT FACTORY FOR DETAILS