



## SQUARE ALUMINUM BOLLARD




### DIMENSIONS

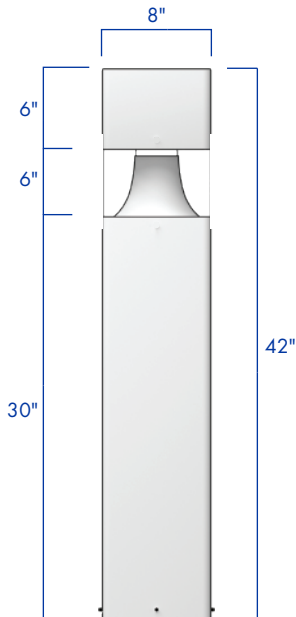

### ANCHORAGE



**Anchor Bolt**  
2" Minimum Projection



**Anchor Plate**  
8" Square  
5.25" B.C.D.  
4" Conduit Opening

### DESCRIPTION

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The SAB8 series by AV Poles and Lighting is ideal for courtyards, pathways, and all low level lighting applications.

### FEATURES

- Square extruded aluminum construction
- Stainless steel hardware
- Acrylic injection molded lenses with smooth clear or opal finish.
- 0-10V dimmable driver
- 10-20KV surge protection
- IP67 rated modules - 5 year warranty
- Up to 180 Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- LED modules arranged in a Type V optic pattern for even light distribution.
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



## ORDERING INFORMATION

AVPL -

BOLLARD	HEIGHT	WATTAGE	COLOR TEMP	VOLTAGE	OPTICS	FINISH	OPTIONS
SAB8	24"	18W 350mA	3000K WARM WHITE	120-277V VOLTAGE SENSING	DR	DARK BRONZE	STANCHION MOUNT
	30"	26W 525mA	4000K NEUTRAL WHITE	347-480V VOLTAGE SENSING	IL	BLACK	HOUSE-SIDE SHIELD
	36"	36W 700mA	5000K COOL WHITE		OL	WHITE	PHOTOCELL BUTTON
	42"	52W 1050mA			WA*	GREY	
						GREEN	

\*APPLY LLF OF 10% TO LUMEN OUTPUT CHART

ALL RAL COLORS AVAILABLE

## LUMEN OUTPUT CHART

<b>3K</b>	18W 350mA	26W 525mA	36W 700mA	52W 1050mA	<b>4K</b>	18W 350mA	26W 525mA	36W 700mA	52W 1050mA	<b>5K</b>	18W 350mA	26W 525mA	36W 700mA	52W 1050mA
	Type V	2,462	3,349	4,348		5,865	Type V	2,592	3,515		4,579	6,156	Type V	2,617