

12 SERIES - LED TUNABLE FULL CUTOFF WALL PACK

The 12 SERIES - LED Tunable Full Cutoff Wall Pack, 130 lm/W, IP65 Wet Location, Select 3X-CCT (3000K, 4000K, 5000K) and 4X-Wattages (30W, 40W, 60W, 80W), Premium Outdoor Luminaire.

FEATURES

Lumen Output	3900 to 10400 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V
CCT	Select (3000K, 4000K, 5000K)
IP Rating	IP65 Wet Location
Warranty	5 Years

Applications

Premium outdoor luminaire suitable for building exteriors, entryways, courtyards, alleys, pedestrian walkways, and general security.

Construction

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. IP65 Wet Location rated for dust-tight, water jets: IEC 60529.

Electrical

Input voltage 120-277V with 0-10V Continuous Dimming. Includes 3X-CCT and 4X-Wattage Tuning Switches inside housing. Operating temperatures -22°F to 113°F (-30°C to 45°C).

Mounting

Wall mounted installation.

Optics

Anti-UV Clear Polycarbonate IES / NEMA Type III Lens.

Listings

ETL certified to meet US and Canadian standards. FCC, CE and RoHS compliant. Listed to qualify for energy-efficient LED lighting rebates.

Warranty

5 yr /50K hrs.






Correlated Color Temperatures (CCT)

3000K

4000K

5000K



SPECIFICATIONS

Energy Data

Input Voltage:	120-277V
Input Frequency:	50/60 Hz
Wattage:	Select (30W, 40W, 60W, 80W)
Power Factor:	>0.9
Total Harmonic Distortion:	<20%
Operating Temperature:	-22°F to 113°F (-30 °C to 45°C)

Lighting Data


Lumens:	Select (3900, 5200, 7800, 10400)
Lumens Per Watt:	130 lm/W
Color Correlated Temperature (CCT):	Select (3000K, 4000K, 5000K)
Dimmable:	0-10V
Color Rendering Index (CRI):	>80
L70:	50000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
E2-R10-30/40/60/80W-30/40/50KCT	30W	120-277V	0.25A@120V, 0.11A@277V	3900	130 lm/W	3000K	0-10V	Dark Bronze	8.50"L x 9.00"W x 8.50"H
	40W		0.33A@120V, 0.14A@277V	5200		4000K			
	60W		0.50A@120V, 0.22A@277V	7800		5000K			
	80W		0.67A@120V, 0.29A@277V	10400					

PHYSICAL DIMENSIONS

One Model

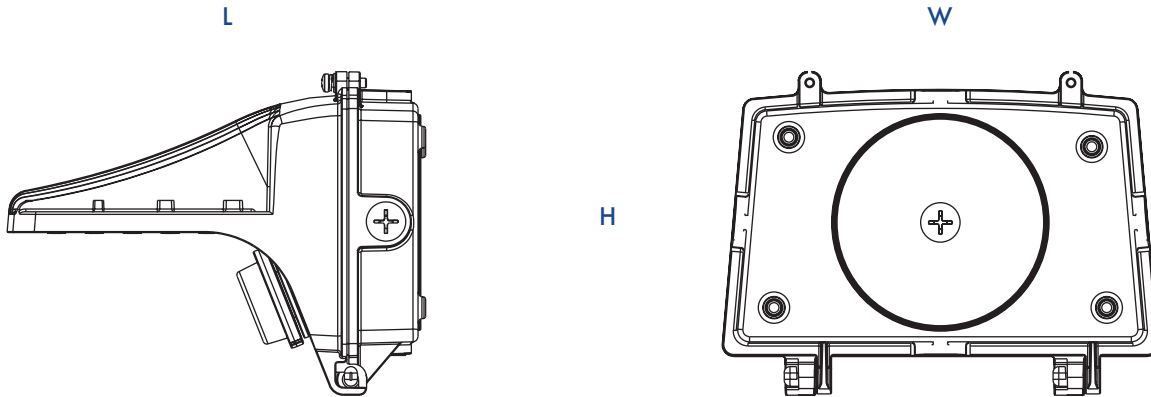

8.50"L x 9.00"W x 8.50"H

