


## GL-SB 6098 LED LUMINAIRE



### DESCRIPTION

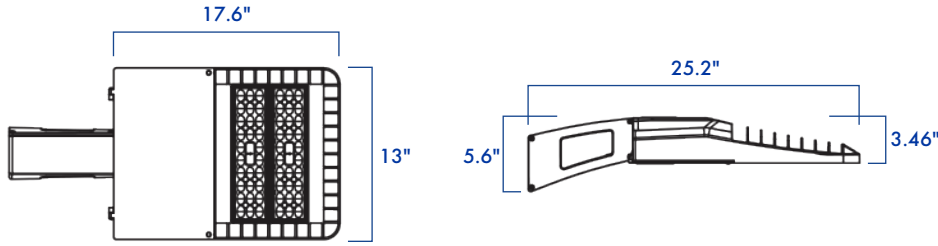


The GL-SB 6098 series by AV Poles & Lighting minimizes surface area with its low profile, modern design. The cast aluminum housing integrates venting for heat dissipation. Ideal for parking lots, campuses, auto dealerships, and design build applications.

### FEATURES

- Cast aluminum construction
- Stainless steel hardware
- Dark sky/full cutoff
- 0-10V dimmable driver
- 10-20KV surge protection
- IP65 rated modules - 5 year warranty
- Up to 130 Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



## ORDERING INFORMATION

LUMINAIRE	OPTICS	WATTAGE	COLOR TEMP	VOLTAGE	MOUNTING	FINISH	OPTIONS		
GL-SB 6098	TYPE III 	73W	3000K WARM WHITE	120-277V VOLTAGE SENSING	WALL MOUNT	DARK BRONZE	HOUSE-SIDE SHIELD		
	TYPE IV 	100W	4000K NEUTRAL WHITE				POLE DRILLING	BLACK	PHOTOCELL BUTTON
	TYPE V 	147W	5000K COOL WHITE				WHITE	FSP211 MOTION SENSOR	
		178W	GREY				3PIN RECEPTACLE		
						GREEN	7PIN RECEPTACLE		
CONTACT FACTORY FOR DRILLING OPTIONS						ALL RAL COLORS AVAILABLE			

## LUMEN OUTPUT CHART

	Type III	Type IV	Type V
73W	9,000	9,200	9,500
100W	11,400	12,100	12,700
147W	17,320	17,565	18,489
178W	19,835	20,325	21,088