


GL-SB 6099 LED LUMINAIRE



DESCRIPTION

The GL-SB 6099 series by AV Poles & Lighting minimizes surface area with its low profile, modern design. The cast aluminum housing integrates venting for heat dissipation. Ideal for parking lots, campuses, auto dealerships, and design build applications.

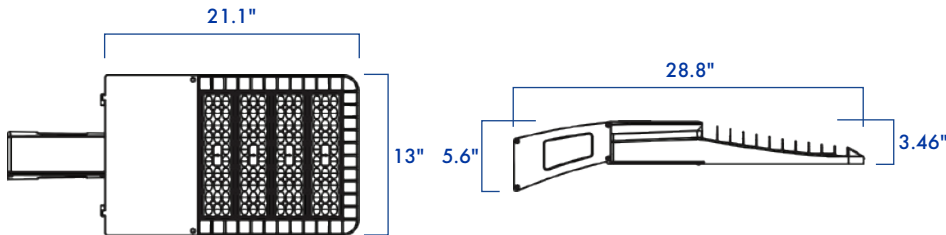


FEATURES

- Cast aluminum construction
- Stainless steel hardware
- Dark sky/full cutoff
- 0-10V dimmable driver
- 10-20KV surge protection
- IP65 rated modules - 5 year warranty
- Up to 140 Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



ORDERING INFORMATION

AVPL -

| LUMINAIRE | OPTICS | WATTAGE | COLOR TEMP | VOLTAGE | MOUNTING | FINISH | OPTIONS |
|---------------|----------------------------------------------------------------------------------------------|---------|------------------------|-----------------------------|---------------|-------------|-------------------------|
| GL-SB 6099 | TYPE III  | 220W | 3000K WARM WHITE | 120-277V VOLTAGE SENSING | WALL MOUNT | DARK BRONZE | HOUSE-SIDE SHIELD |
| | TYPE IV  | 307W | 4000K NEUTRAL WHITE | | | | PHOTOCELL BUTTON |
| | TYPE V  | | 5000K COOL WHITE | | | | FSP211 MOTION SENSOR |
| | | | | | | GREY | 3PIN RECEPTACLE |
| | | | | | | GREEN | 7PIN RECEPTACLE |

CONTACT
FACTORY FOR
DRILLING OPTIONS

ALL RAL COLORS
AVAILABLE

LUMEN OUTPUT CHART

| | Type III | Type IV | Type V |
|------|----------|---------|--------|
| 220W | 30,299 | 30,391 | 31,130 |
| 307W | 37,042 | 37,808 | 38,080 |