




AVPL TER - Terralume LED Luminaire

Description

The TER Terralume by AV Poles & Lighting maximizes surface area while keeping a very low profile, modern design. The entire one-piece body acts as a heat-sink. Ideal for parking lots, campuses, auto dealerships, and design build applications.

Features

- Cast Aluminum construction
- Stainless Steel hardware
- Dark Sky/ Full Cutoff
- IP67 rated modules - 5 year warranty
- Up to 130+ Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- Multiple lighting distribution options with optical lens transmittance up to 98%
- Multiple LED modules can easily be connected in series
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

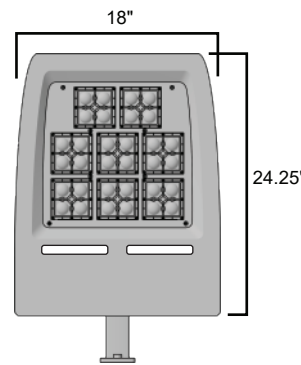

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options																																																	
<input type="checkbox"/> AVPL TER	LED 700mA: 168W, 200W, 243W, 265W 1A: 263W, 316W, 366W, 409W	<input type="checkbox"/> 120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> MT	<input type="checkbox"/> Wall Mount.....	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green	Optical <input type="checkbox"/> House Side Shield Electrical <input type="checkbox"/> 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor																																																	
Optics	Lumen Output (4K)	<input type="checkbox"/> 120-277 Voltage Sensing	<input type="checkbox"/> 1..... <input type="checkbox"/> 2-90..... <input type="checkbox"/> 2-180..... <input type="checkbox"/> 3-90..... <input type="checkbox"/> 3-120..... <input type="checkbox"/> 4-90.....																																																			
<input type="checkbox"/> Type II <input type="checkbox"/> Type III <input type="checkbox"/> Type IV <input type="checkbox"/> Type V	<table border="1"> <thead> <tr> <th></th> <th>168W 700mA</th> <th>200W 1A</th> <th>243W 700mA</th> <th>265W 1A</th> </tr> </thead> <tbody> <tr> <td>Type II</td> <td>22,120</td> <td>30,083</td> <td>26,544</td> <td>36,100</td> </tr> <tr> <td>Type III</td> <td>22,790</td> <td>30,994</td> <td>27,348</td> <td>37,193</td> </tr> <tr> <td>Type IV</td> <td>21,905</td> <td>29,791</td> <td>26,286</td> <td>35,749</td> </tr> <tr> <td>Type V</td> <td>22,160</td> <td>30,138</td> <td>26,592</td> <td>36,165</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th></th> <th>243W 700mA</th> <th>366W 1A</th> <th>265W 700mA</th> <th>409W 1A</th> </tr> </thead> <tbody> <tr> <td>Type II</td> <td>30,715</td> <td>40,040</td> <td>33,496</td> <td>44,745</td> </tr> <tr> <td>Type III</td> <td>31,639</td> <td>41,248</td> <td>34,503</td> <td>46,094</td> </tr> <tr> <td>Type IV</td> <td>30,424</td> <td>39,638</td> <td>33,178</td> <td>44,295</td> </tr> <tr> <td>Type V</td> <td>30,764</td> <td>40,114</td> <td>33,549</td> <td>44,826</td> </tr> </tbody> </table>		168W 700mA	200W 1A	243W 700mA	265W 1A	Type II	22,120	30,083	26,544	36,100	Type III	22,790	30,994	27,348	37,193	Type IV	21,905	29,791	26,286	35,749	Type V	22,160	30,138	26,592	36,165		243W 700mA	366W 1A	265W 700mA	409W 1A	Type II	30,715	40,040	33,496	44,745	Type III	31,639	41,248	34,503	46,094	Type IV	30,424	39,638	33,178	44,295	Type V	30,764	40,114	33,549	44,826	<input type="checkbox"/> = LED Only		
	168W 700mA	200W 1A	243W 700mA	265W 1A																																																		
Type II	22,120	30,083	26,544	36,100																																																		
Type III	22,790	30,994	27,348	37,193																																																		
Type IV	21,905	29,791	26,286	35,749																																																		
Type V	22,160	30,138	26,592	36,165																																																		
	243W 700mA	366W 1A	265W 700mA	409W 1A																																																		
Type II	30,715	40,040	33,496	44,745																																																		
Type III	31,639	41,248	34,503	46,094																																																		
Type IV	30,424	39,638	33,178	44,295																																																		
Type V	30,764	40,114	33,549	44,826																																																		
	Color Temp 3000K Warm 4000K Neutral 5000K Cool																																																					