


GW LED LANTERN



DIMENSIONS

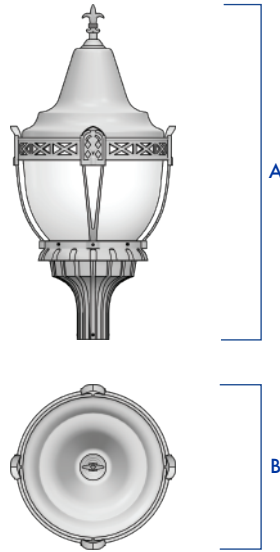

| FIXTURE | A | B |
|---------|-----|-----|
| GW | 38" | 18" |

DESCRIPTION

This prismatic Acorn is an inexpensive solution for a variety of lighting applications. The GW LED Lantern by AV Poles and Lighting is ideal for commercial, municipal, and design build applications.



FEATURES

- Spun aluminum top, cast aluminum crown, cage, and fitter
- Stainless steel hardware
- 0-10V dimmable driver
- 10-20KV surge protection
- IP67 rated modules - 5 year warranty
- Up to 180 Lumens Per Watt output
- Low maintenance cost with lifetime >54,000 hrs
- LED modules arranged in a Type V optic pattern for even light distribution.
- Refractive prismatic lens available in Type III or Type V light distribution pattern.
- TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.



ORDERING INFORMATION

AVPL -

| LUMINAIRE | WATTAGE | COLOR TEMP | VOLTAGE | LENS | MOUNTING | FINISH | OPTIONS |
|---------------------------------------|----------------|------------------------|-----------------------------|--|-----------------------|-----------------------------|-------------------------|
| GW | 40W 350mA | 3000K WARM WHITE | 120-277V VOLTAGE SENSING | TYPE III REFRACTIVE PRISMATIC  | PT23 Ø2.375" TENON | DARK BRONZE | LOUVERS INTERNAL |
| | 58W 525mA | 4000K NEUTRAL WHITE | 347-480V VOLTAGE SENSING | | PT27 Ø2.875" TENON | BLACK | HOUSE-SIDE SHIELD |
| | 80W 700mA | 5000K COOL WHITE | | TYPE V REFRACTIVE PRISMATIC  | PT30 Ø3" TENON | WHITE | PHOTOCELL BUTTON |
| | 116W 1050mA | | | | | GREY | FSP211 MOTION SENSOR |
| | | | | | | GREEN | 3PIN RECEPTACLE |
| | | | | | | | 7PIN RECEPTACLE |
| CONTACT FACTORY FOR OTHER SIZES | | | | | | ALL RAL COLORS AVAILABLE | |

LUMEN OUTPUT CHART

| 3K | | | | | 4K | | | | | 5K | | | | |
|--------|--------------|--------------|--------------|----------------|--------|--------------|--------------|--------------|----------------|--------|--------------|--------------|--------------|----------------|
| | 40W 350mA | 58W 525mA | 80W 700mA | 116W 1050mA | | 40W 350mA | 58W 525mA | 80W 700mA | 116W 1050mA | | 40W 350mA | 58W 525mA | 80W 700mA | 116W 1050mA |
| Type V | 5,472 | 7,470 | 9,664 | 13,084 | Type V | 5,760 | 7,841 | 10,176 | 13,827 | Type V | 5,817 | 7,919 | 10,277 | 13,965 |