




POLES & LIGHTING


Fixtures, Brackets, and Bases

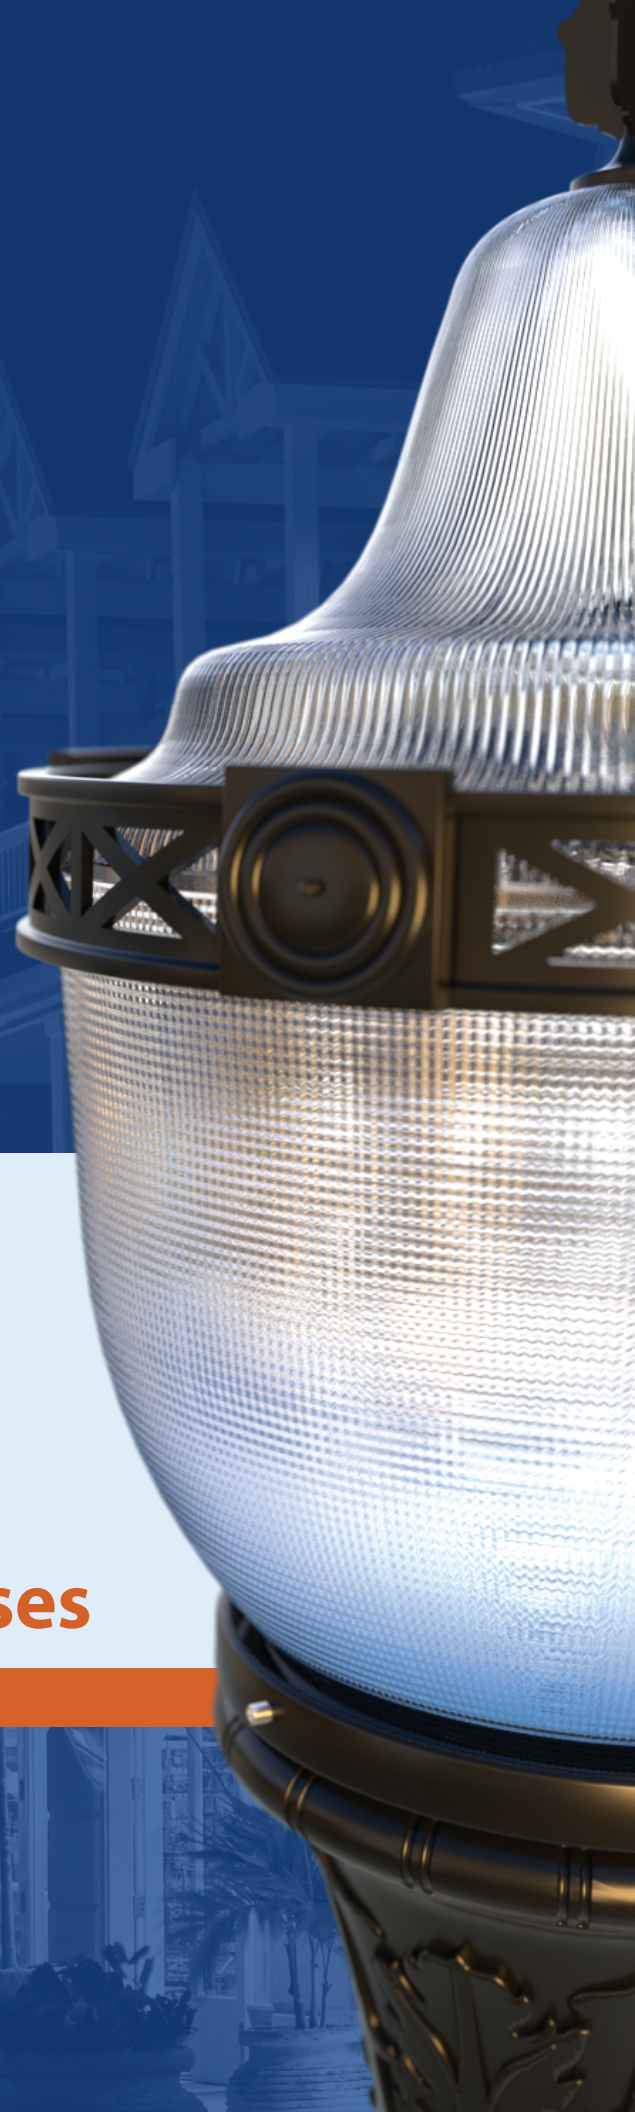

CONTENT

CONTENT	2
APPLICATION PHOTOS	3
FIXTURES	4
BRACKETS	20
BASES	35
TERMS AND CONDITIONS	47



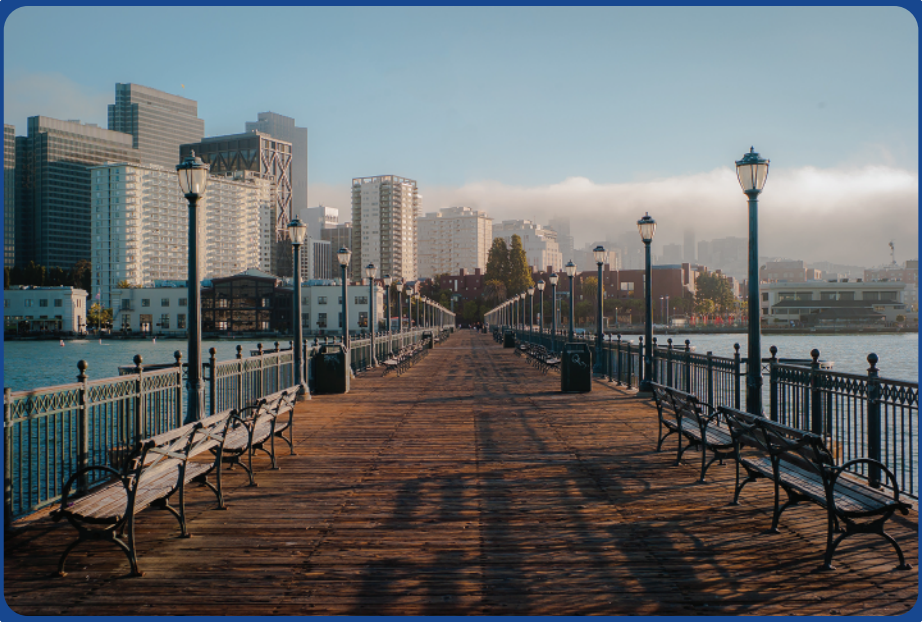

Specifiers, Architects, and Engineers consider more than just aesthetic appeal when selecting product. Exemplary quality, ease of installation, and return on investment are equally as important.

AV Poles & Lighting exceeds all these concerns.

Who is AV Poles & Lighting?

AV Poles and Lighting is a leading manufacturer of commercial and industrial grade poles, brackets, fixtures, and bases for the outdoor lighting industry. With a combined 60 years experience in manufacturing, our knowledgeable staff offers the latest design solutions for any project and/or special application needs.

Whether it is steel or aluminum, contemporary or traditional, new or custom fabrication, AV Poles & Lighting has a product for every requirement.

Custom Builds and Modification


AV Poles & Lighting can help build your vision. With over 60 years of Custom and Modified product experience, we are available to answer questions, offer advice about design, lamping, and overall lighting objectives.

Our team of industry professionals respond quickly to new ideas. Our engineering department can provide custom cut sheets that visualize your ideas. After you've perfected your design, we can manufacture your vision in a timely and cost effective manner.


**Don't hesitate to contact us.
We'd love to hear from you!**



FIXTURES

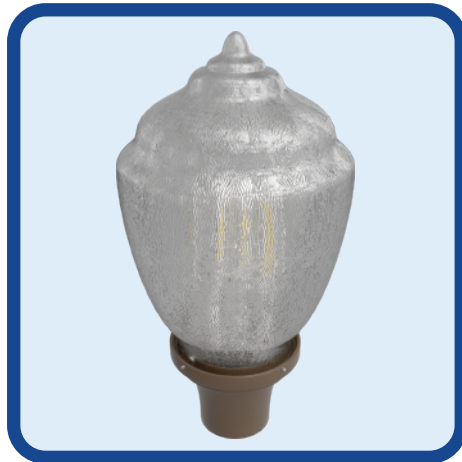

AS
Page 6

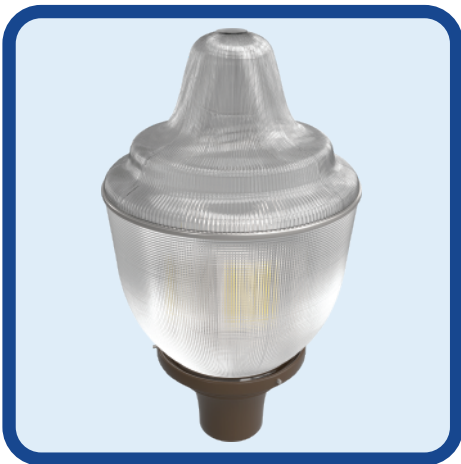

RA
Page 7



GW
Page 8



CA-M
Page 9



VPTL
Page 10



CL
Page 11



CL-NP
Page 12

FIXTURES



AL
Page 13



RA-C
Page 14



X47
Page 15



SEA
Page 16



ENV
Page 17




ENV-SS
Page 18



GL
Page 19

AVPL AS - Acorn Small Series



A



B



C

Description

This traditional Acorn is an inexpensive solution for a variety of lighting applications. The AS series by AV Poles and Lighting is ideal for commercial, municipal, and design build applications.

Materials

Available with clear patterned or smooth opal lens in either acrylic or polycarbonate construction.

Medium base porcelain socket.



Cast aluminum fitter.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- AS <input type="checkbox"/>	LED 24W (350mA) <input type="checkbox"/> 36W (350mA) <input type="checkbox"/> 60W (350mA) <input type="checkbox"/> PSMH 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/> HPS 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/>	120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> MT <input type="checkbox"/>	<input type="checkbox"/> Wall Mount..... <input type="checkbox"/> <input type="checkbox"/> Post Top..... <input type="checkbox"/>	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green	Optical Clear Patterned Polycarbonate <input type="checkbox"/> Opal Smooth Polycarbonate <input type="checkbox"/> Clear Patterned Acrylic <input type="checkbox"/> Opal Smooth Acrylic <input type="checkbox"/> House Side Shield <input type="checkbox"/> Internal Louver (Type V) <input type="checkbox"/> Glass Refractor (Type III,V) <input type="checkbox"/> Internal Glass Chimney <input type="checkbox"/> Electrical 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
Fitter <input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Color Temp 3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/>	120-277 Voltage Sensing <input type="checkbox"/>			
	<input type="checkbox"/> = LED Only	<input type="checkbox"/> = LED Only			

AVPL RA - Refractive Acorn Series



Description

This traditional prismatic Acorn is an inexpensive solution for a variety of lighting applications. The RA series by AV Poles and Lighting is ideal for commercial, municipal, and design build applications.

Materials

Refractive prismatic lens

Medium base porcelain socket

Cast aluminum fitter


Optional spun aluminum top

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- RA <input type="checkbox"/>	LED 24W (350mA) 36W (350mA) 60W (350mA) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	120 <input type="checkbox"/>		<input type="checkbox"/> Dark Bronze	 RA-SAT <input type="checkbox"/> Optical House Side Shield <input type="checkbox"/> Electrical 10-20KV Surge Protector 0-10V Dimmable Driver(s) Photo Cell + Voltage <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
Fitter <input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	PSMH 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	208 <input type="checkbox"/>		<input type="checkbox"/> Black	
	HPS 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	240 <input type="checkbox"/>	<input type="checkbox"/> Wall Mount.....	<input type="checkbox"/> White	
		277 <input type="checkbox"/>	<input type="checkbox"/> Post Top.....	<input type="checkbox"/> Grey	
Optics <input type="checkbox"/> Type III <input type="checkbox"/> Type V	Color Temp 3000K Warm 4000K Natural 5000K Cool <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	MT <input type="checkbox"/>		<input type="checkbox"/> Green	
	<input type="checkbox"/> = LED Only	120-277 Voltage Sensing <input type="checkbox"/>			

AVPL GW - GW Lantern

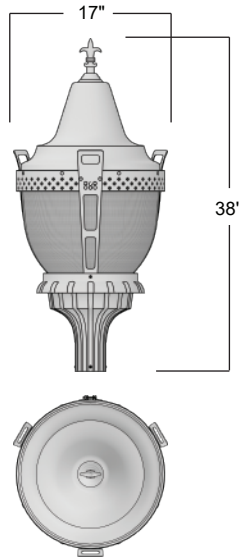

Description

This traditional prismatic Acorn is an inexpensive solution for a variety of lighting applications. The GW Lantern series by AV Poles and Lighting is ideal for commercial, municipal, and design build applications.

Materials





Available with refractive prismatic lens.

Medium base porcelain socket.


Cast aluminum fitter and decorative housing.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- GW <input type="checkbox"/>	LED 24W (350mA) 36W (350mA) 60W (350mA) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	120 <input type="checkbox"/>		<input type="checkbox"/> Dark Bronze	Optical House Side Shield <input type="checkbox"/>
Optics <input type="checkbox"/> Type III  <input type="checkbox"/> Type V 	PSMH 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	208 <input type="checkbox"/>		<input type="checkbox"/> Black	
	HPS 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	240 <input type="checkbox"/>	<input type="checkbox"/> Wall Mount..... 	<input type="checkbox"/> White	
		277 <input type="checkbox"/>	<input type="checkbox"/> Post Top..... 	<input type="checkbox"/> Grey	Electrical 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
	Color Temp 3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/>	MT <input type="checkbox"/>		<input type="checkbox"/> Green	
		120-277 Voltage Sensing <input type="checkbox"/>			
	<input type="checkbox"/> = LED Only	<input type="checkbox"/> = LED Only			

AVPL CA-M - Cast Aluminum Manufactured Victorian Lantern

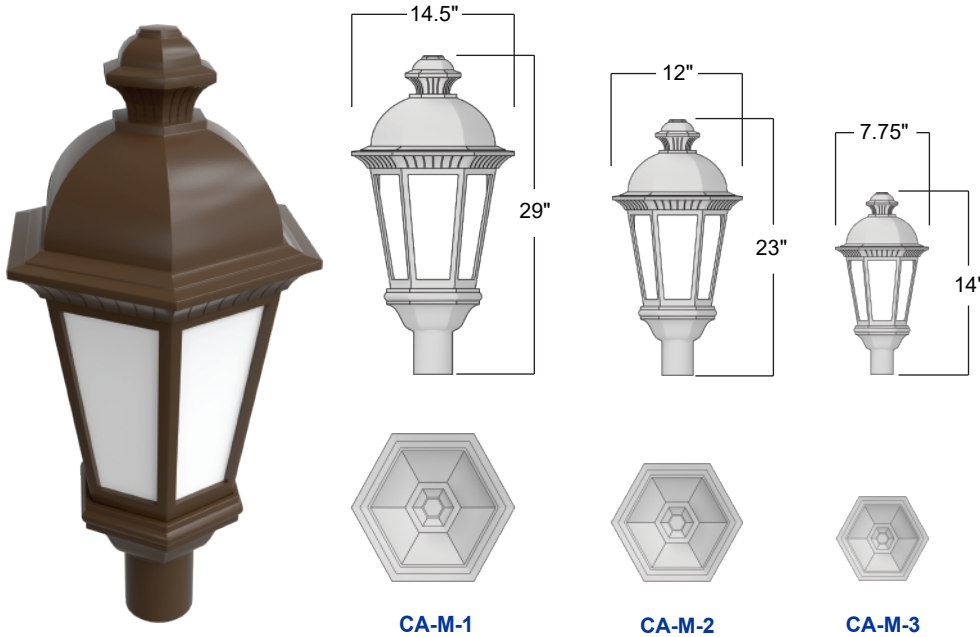

Description

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The CA-M series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

Materials

Cast aluminum top, bottom, cage, and fitter.


Roof optics distribution delivered by a one piece, roof mounted horizontal reflector system which eliminates uplight and provides complete cutoff.

Reflector cavity made of segmented anodized aluminum. Roof optics Type III, IV, and V horizontal are available for medium base lamps.


Medium base porcelain socket.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- CA-M-1 <input type="checkbox"/>	LED 12W (350mA) <input type="checkbox"/> 24W (350mA) <input type="checkbox"/> 36W (350mA) <input type="checkbox"/>	120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> MT <input type="checkbox"/>		<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green	Optical Clear Patterned Polycarbonate <input type="checkbox"/> Clear Smooth Polycarbonate <input type="checkbox"/> Opal Smooth Polycarbonate <input type="checkbox"/> Clear Patterned Acrylic <input type="checkbox"/> Clear Smooth Acrylic <input type="checkbox"/> Opal Smooth Acrylic <input type="checkbox"/> House Side Shield <input type="checkbox"/> Internal Louver (Type V) <input type="checkbox"/> Glass Refractor (Type III,V) <input type="checkbox"/> Internal Glass Chimney <input type="checkbox"/>
AVPL- CA-M-2 <input type="checkbox"/>	PSMH 50W <input type="checkbox"/> 70W <input type="checkbox"/> 100W <input type="checkbox"/>				= CA-M-1 and CA-M-2 Only
AVPL- CA-M-3 <input type="checkbox"/>	HPS 50W <input type="checkbox"/> 70W <input type="checkbox"/> 100W <input type="checkbox"/>		<input type="checkbox"/> Wall Mount..... <input type="checkbox"/> <input type="checkbox"/> Post Top..... <input type="checkbox"/>		Electrical 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
Optics <input type="checkbox"/> Type V 	Color Temp 3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/>	120-277 Voltage Sensing <input type="checkbox"/>			= LED Only

AVPL VPTL - Victorian Post Top Lantern

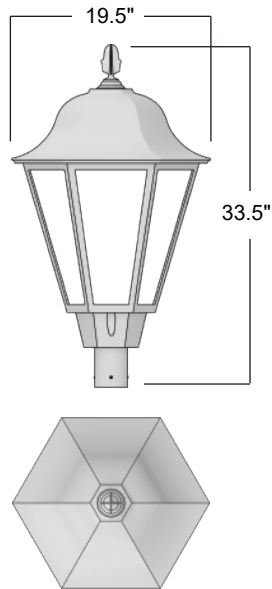

Description

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The VPTL series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

Materials

Cast aluminum top, bottom, cage, and fitter.




Roof optics distribution delivered by a one piece, roof mounted horizontal reflector system which eliminates uplight and provides complete cutoff.

Reflector cavity made of segmented anodized aluminum. Roof optics Type III, IV, and V horizontal are available for medium base lamps.



Medium base porcelain socket.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- VPTL <input type="checkbox"/>	LED 36W (700mA) <input type="checkbox"/> 72W (700mA) <input type="checkbox"/> 56W (1A) <input type="checkbox"/> 112W (1A) <input type="checkbox"/>	120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> MT <input type="checkbox"/>	<input type="checkbox"/> Wall Mount..... <input type="checkbox"/> <input type="checkbox"/> Post Top..... <input type="checkbox"/>	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green	Optical Clear Patterned Polycarbonate <input type="checkbox"/> Clear Smooth Polycarbonate <input type="checkbox"/> Opal Smooth Polycarbonate <input type="checkbox"/> Clear Patterned Acrylic <input type="checkbox"/> Clear Smooth Acrylic <input type="checkbox"/> Opal Smooth Acrylic <input type="checkbox"/> House Side Shield <input type="checkbox"/> Internal Louver (Type V) <input type="checkbox"/> Glass Refractor (Type III,V) <input type="checkbox"/> Internal Glass Chimney <input type="checkbox"/>
Optics <input type="checkbox"/> Type III  <input type="checkbox"/> Type IV  <input type="checkbox"/> Type V 	PSMH 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/> HPS 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/>	120-277 Voltage Sensing <input type="checkbox"/>			Electrical 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
	Color Temp 3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/>	<input type="checkbox"/> = LED Only	<input type="checkbox"/> = LED Only		<input type="checkbox"/> = LED Only

AVPL CL - Coach Lantern

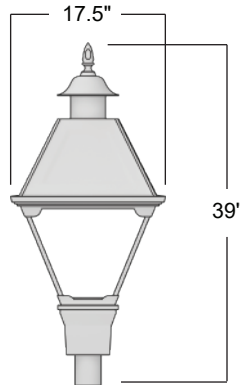

Description

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The CL series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

Materials

Cast aluminum top, bottom, cage, and fitter.




Roof optics distribution delivered by a one piece, roof mounted horizontal reflector system which eliminates uplight and provides complete cutoff.

Reflector cavity made of segmented anodized aluminum. Roof optics Type III, IV, and V horizontal are available for medium base lamps.


Medium base porcelain socket.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- CL <input type="checkbox"/>	LED 36W (700mA) <input type="checkbox"/> 72W (700mA) <input type="checkbox"/> 56W (1A) <input type="checkbox"/> 112W (1A) <input type="checkbox"/>	120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> MT <input type="checkbox"/>	<input type="checkbox"/> Wall Mount..... <input type="checkbox"/>	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green	Optical Clear Patterned Polycarbonate <input type="checkbox"/> Clear Smooth Polycarbonate <input type="checkbox"/> Opal Smooth Polycarbonate <input type="checkbox"/> Clear Patterned Acrylic <input type="checkbox"/> Clear Smooth Acrylic <input type="checkbox"/> Opal Smooth Acrylic <input type="checkbox"/> House Side Shield <input type="checkbox"/> Internal Louver (Type V) <input type="checkbox"/> Glass Refractor (Type III,V) <input type="checkbox"/> Internal Glass Chimney <input type="checkbox"/>
Optics <input type="checkbox"/> Type III  <input type="checkbox"/> Type IV  <input type="checkbox"/> Type V 	PSMH 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/> HPS 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/>	120-277 Voltage Sensing <input type="checkbox"/>	<input type="checkbox"/> Post Top..... <input type="checkbox"/>		Electrical 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
	Color Temp 3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/>	<input type="checkbox"/> = LED Only	<input type="checkbox"/> = LED Only		<input type="checkbox"/> = LED Only

AVPL CL-NP - Coach Lantern Chain Canopy Mount

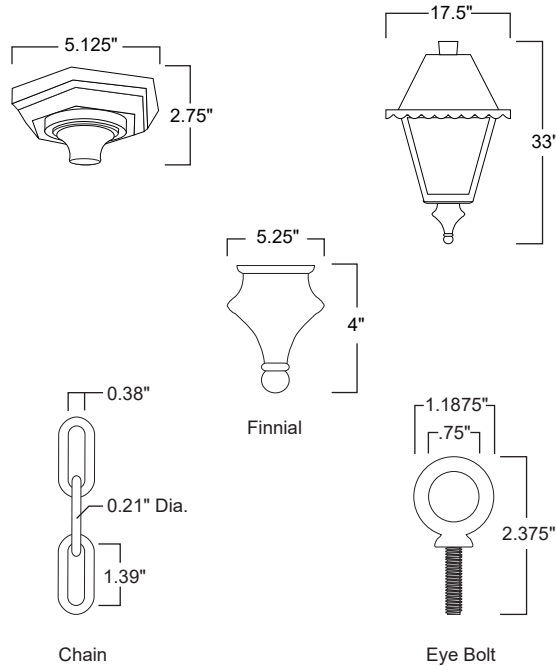

Description

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The CL-NP by AV Poles and Lighting is ideal for design build or specifications projects.

Materials

Cast aluminum top, bottom, cage, and fitter.




Roof optics distribution delivered by a one piece, roof mounted horizontal reflector system which eliminates uplight and provides complete cutoff.

Reflector cavity made of segmented anodized aluminum. Roof optics Type III, IV, and V horizontal are available for medium base lamps.


Medium base porcelain socket.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL CL-NP <input type="checkbox"/>	LED 36W (700mA) <input type="checkbox"/> 72W (700mA) <input type="checkbox"/> 56W (1A) <input type="checkbox"/> 112W (1A) <input type="checkbox"/>	120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> MT <input type="checkbox"/>	<input type="checkbox"/> Stem Mount..... <input type="radio"/> <input type="checkbox"/> Chain Mount..... <input type="radio"/>	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green	Optical <div> Clear Patterned Polycarbonate <input type="checkbox"/> Clear Smooth Polycarbonate <input type="checkbox"/> Opal Smooth Polycarbonate <input type="checkbox"/> </div> <div> Clear Patterned Acrylic <input type="checkbox"/> Clear Smooth Acrylic <input type="checkbox"/> Opal Smooth Acrylic <input type="checkbox"/> </div> <div> House Side Shield <input type="checkbox"/> Internal Louver (Type V) <input type="checkbox"/> Glass Refractor (Type III,V) <input type="checkbox"/> </div> <div> Internal Glass Chimney <input type="checkbox"/> </div> Electrical <div> 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> </div> <div> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/> </div>
Optics <input type="checkbox"/> Type III  <input type="checkbox"/> Type IV  <input type="checkbox"/> Type V 	PSMH 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/> HPS 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/>	3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/>	120-277 Voltage Sensing <input type="checkbox"/>		
	Color Temp 3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/>				
	<input type="checkbox"/> = LED Only	<input type="checkbox"/> = LED Only			<input type="checkbox"/> = HID Only

AVPL AL - Acorn Large Series



A

B

C

Description

This traditional Acorn is an inexpensive solution for a variety of lighting applications. The AL series by AV Poles and Lighting is ideal for commercial, municipal, and design build applications.

Materials

Available with clear patterned or smooth opal lens in either acrylic or polycarbonate construction.

Medium base porcelain socket.


Cast aluminum fitter.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- AL	LED 24W (350mA) 36W (350mA) 60W (350mA)	120			Optical Clear Patterned Polycarbonate Opal Smooth Polycarbonate Clear Patterned Acrylic Opal Smooth Acrylic House Side Shield Internal Louver (Type V) Glass Refractor (Type III, V) Internal Glass Chimney
<input type="checkbox"/>	PSMH 70W 100W 150W	208		<input type="checkbox"/> Dark Bronze	<input type="checkbox"/>
Fitter	HPS 70W 100W 150W	240	<input type="checkbox"/> Wall Mount.....	<input type="checkbox"/> Black	<input type="checkbox"/>
<input type="checkbox"/> A		277	<input type="checkbox"/> Post Top.....	<input type="checkbox"/> White	<input type="checkbox"/>
<input type="checkbox"/> B		MT		<input type="checkbox"/> Grey	<input type="checkbox"/>
<input type="checkbox"/> C				<input type="checkbox"/> Green	
	Color Temp 3000K Warm 4000K Natural 5000K Cool	120-277 Voltage Sensing			Electrical 10-20KV Surge Protector 0-10V Dimmable Driver(s) Photo Cell + Voltage High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor
	<input type="checkbox"/> = LED Only	<input type="checkbox"/> = LED Only			

AVPL RA-C - Refractive Acorn Crown Series



Description

This traditional prismatic Acorn is an inexpensive solution for a variety of lighting applications. The RA series by AV Poles and Lighting is ideal for commercial, municipal, and design build applications.

Materials

Refractive prismatic lens

Medium base porcelain socket






Cast aluminum fitter and crown

Optional spun aluminum top


Optional cast aluminum crown and cage

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- RA-C <input type="checkbox"/>	LED 24W (350mA) 36W (350mA) 60W (350mA) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	120 <input type="checkbox"/>		<input type="checkbox"/> Dark Bronze	 RA-CC <input type="checkbox"/>
Fitter	PSMH 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	208 <input type="checkbox"/>		<input type="checkbox"/> Black	
<input type="checkbox"/> A	HPS 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	240 <input type="checkbox"/>	<input type="checkbox"/> Wall Mount..... <input type="checkbox"/>	<input type="checkbox"/> White	
<input type="checkbox"/> B		277 <input type="checkbox"/>	<input type="checkbox"/> Post Top..... <input type="checkbox"/>	<input type="checkbox"/> Grey	
<input type="checkbox"/> C		MT <input type="checkbox"/>		<input type="checkbox"/> Green	 RA-TC <input type="checkbox"/>
Optics	Color Temp	120-277 Voltage Sensing <input type="checkbox"/>			 RA-TCC <input type="checkbox"/>
<input type="checkbox"/> Type III  <input type="checkbox"/> Type V 	3000K Warm 4000K Natural 5000K Cool <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> = LED Only			Optical House Side Shield <input type="checkbox"/>
		<input type="checkbox"/> = LED Only			Electrical 10-20KV Surge Protector 0-10V Dimmable Driver(s) Photo Cell + Voltage <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
					High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>

AVPL X47 - Light Fixture

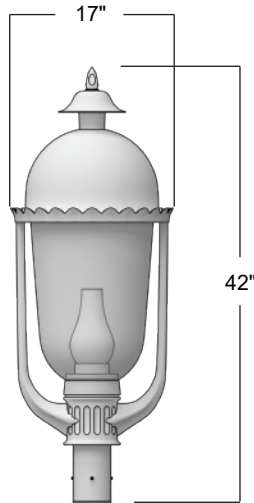

Description

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The X47 series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

Materials

Cast aluminum top, bottom, cage, and fitter.

Roof optics distribution delivered by a one piece, roof mounted horizontal reflector system which eliminates uplight and provides complete cutoff.

Reflector cavity made of segmented anodized aluminum. Roof optics Type III, IV, and V horizontal are available for medium base lamps.


Medium base porcelain socket.

TCIG thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- X47 <input type="checkbox"/>	LED- VERTICAL 24W (350mA) <input type="checkbox"/> 36W (350mA) <input type="checkbox"/> 60W (350mA) <input type="checkbox"/>	120 <input type="checkbox"/>		<input type="checkbox"/> Dark Bronze	Optical Clear Smooth Polycarbonate <input type="checkbox"/> Opal Smooth Polycarbonate <input type="checkbox"/> Clear Smooth Acrylic <input type="checkbox"/> Opal Smooth Acrylic <input type="checkbox"/> House Side Shield <input type="checkbox"/> Internal Louver (Type V) <input type="checkbox"/> Glass Refractor (Type III,V) <input type="checkbox"/> Internal Glass Chimney <input type="checkbox"/>
Optics <input type="checkbox"/> Type III <input type="checkbox"/> Type IV <input type="checkbox"/> Type V	LED- HORIZONTAL 36W (700mA) <input type="checkbox"/> 56W (1A) <input type="checkbox"/> PSMH 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/> HPS 70W <input type="checkbox"/> 100W <input type="checkbox"/> 150W <input type="checkbox"/>	208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> MT <input type="checkbox"/>	<input type="checkbox"/> Wall Mount..... <input type="checkbox"/> Post Top.....	<input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green <input type="checkbox"/> White Dome Top (Optional)	Electrical 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
<input type="checkbox"/> = Horizontal LED or HID Only	Color Temp 3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/> <input type="checkbox"/> = LED Only	120-277 Voltage Sensing <input type="checkbox"/> <input type="checkbox"/> = LED Only			<input type="checkbox"/> = HID or Vertical LED Only

AVPL SEA - Seaside Post Top Lantern

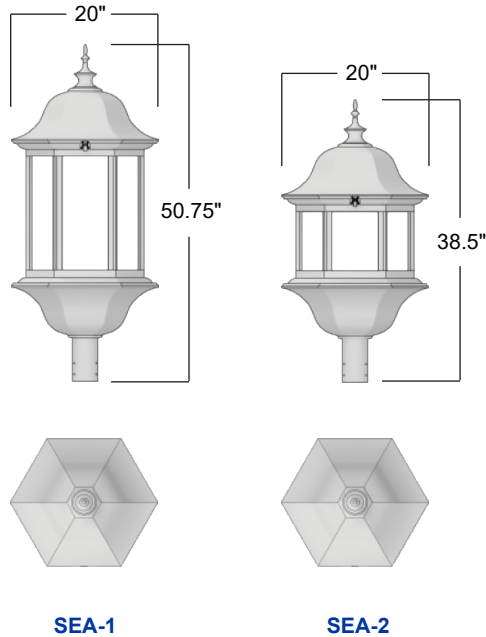

Description

An outstanding traditional design and authentic appearance that is suitable for a variety of lighting applications. The SEA series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

Materials

Cast aluminum top, bottom, cage, and fitter.

Roof optics distribution delivered by a one piece, roof mounted horizontal reflector system which eliminates uplight and provides complete cutoff.

Reflector cavity made of segmented anodized aluminum. Roof optics Type III, IV, and V horizontal are available for medium base lamps.


Medium base porcelain socket.

TCIG thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL-SEA-1 <input type="checkbox"/>	LED 36W (700mA) 72W (700mA) <input type="checkbox"/> <input type="checkbox"/>	120 <input type="checkbox"/>		<input type="checkbox"/> Dark Bronze	Optical Clear Patterned Polycarbonate <input type="checkbox"/> Clear Smooth Polycarbonate <input type="checkbox"/> Opal Smooth Polycarbonate <input type="checkbox"/>
AVPL-SEA-2 <input type="checkbox"/>	56W (1A) 112W (1A) <input type="checkbox"/> <input type="checkbox"/>	208 <input type="checkbox"/>		<input type="checkbox"/> Black	Clear Patterned Acrylic <input type="checkbox"/> Clear Smooth Acrylic <input type="checkbox"/> Opal Smooth Acrylic <input type="checkbox"/>
Optics	PSMH 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	240 <input type="checkbox"/>	<input type="checkbox"/> Wall Mount..... <input type="checkbox"/>	<input type="checkbox"/> White	House Side Shield <input type="checkbox"/> Internal Louver (Type V) <input type="checkbox"/> Glass Refractor (Type III,V) <input type="checkbox"/>
<input type="checkbox"/> Type III	HPS 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	277 <input type="checkbox"/>	<input type="checkbox"/> Post Top..... <input type="checkbox"/>	<input type="checkbox"/> Grey	Internal Glass Chimney <input type="checkbox"/>
<input type="checkbox"/> Type IV	Color Temp 3000K Warm 4000K Natural 5000K Cool <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	MT <input type="checkbox"/>		<input type="checkbox"/> Green	Electrical 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/>
<input type="checkbox"/> Type V	<input type="checkbox"/> = LED Only	120-277 Voltage Sensing <input type="checkbox"/>			High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
	<input type="checkbox"/> = LED Only	<input type="checkbox"/> = LED Only			<input type="checkbox"/> = LED Only

AVPL ENV - Architectural Bell Luminaire

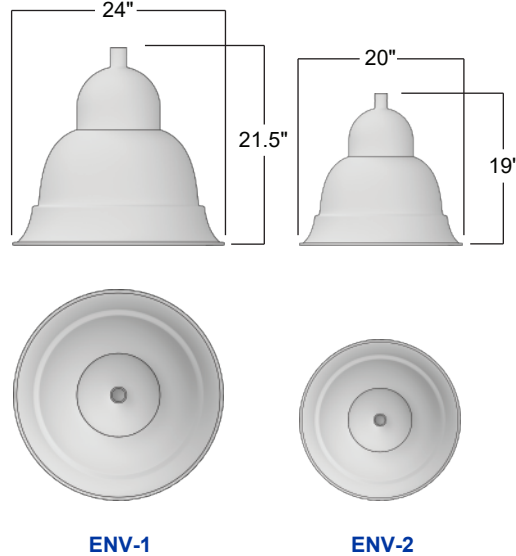

Description

Decorative architectural design provides a unique lighting solution for a variety of applications. The ENV series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

Materials

Durable, one-piece spun aluminum housing, aluminum door frame encases clear flat tempered glass lens.

Optics distribution delivered by a one piece horizontal reflector system which eliminates uplight and provides complete cutoff.

Reflector cavity made of segmented anodized aluminum. Optics Type III, IV, and V horizontal are available for medium base lamps.


Mogul and Medium base porcelain sockets.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- ENV-1 <input type="checkbox"/>	LED 36W (700mA) 72W (700mA) 108W (700mA) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	120 <input type="checkbox"/>	<input type="checkbox"/> 1.....	<input type="checkbox"/> Dark Bronze	Optical House Side Shield <input type="checkbox"/>
AVPL- ENV-2 <input type="checkbox"/>	56W (1A) 112W (1A) 168W (1A) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	208 <input type="checkbox"/>	<input type="checkbox"/> 2-90.....	<input type="checkbox"/> Black	Electrical 10-20KV Surge Protector 0-10V Dimmable Driver(s) Photo Cell + Voltage <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
Optics	PSMH 50W 70W 100W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 150W 250W 400W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	240 <input type="checkbox"/>	<input type="checkbox"/> 2-180.....	<input type="checkbox"/> White	High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
<input type="checkbox"/> Type III	HPS 50W 70W 100W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> 150W 250W 400W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	277 <input type="checkbox"/>	<input type="checkbox"/> 3-90.....	<input type="checkbox"/> Grey	
<input type="checkbox"/> Type IV		MT <input type="checkbox"/>	<input type="checkbox"/> 3-120.....	<input type="checkbox"/> Green	
<input type="checkbox"/> Type V		120-277 Voltage Sensing <input type="checkbox"/>	<input type="checkbox"/> 4-90.....		
	<input type="checkbox"/> = ENV-1 Only	<input type="checkbox"/> = LED Only	<input type="checkbox"/> Wall Mount.....		Color Temp 3000K Warm 4000K Natural 5000K Cool <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> = LED Only

AVPL ENV - SS Architectural Bell Luminaire

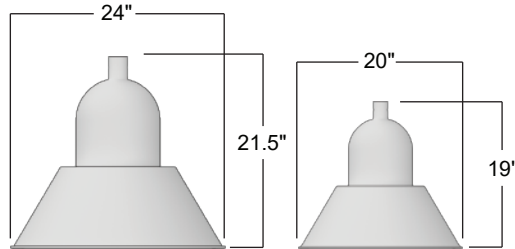

ENV-SS-1



ENV-SS-2

Description

Decorative architectural design provides a unique lighting solution for a variety of applications. The ENVSS series by AV Poles and Lighting is ideal for commercial, municipal, and design build lighting applications.

Materials

Durable, one-piece spun aluminum housing, aluminum door frame encases clear flat tempered glass lens.

Optics distribution delivered by a one piece horizontal reflector system which eliminates uplight and provides complete cutoff.

Reflector cavity made of segmented anodized aluminum. Optics Type III, IV, and V horizontal are available for medium base lamps.


Mogul and Medium base porcelain sockets.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- ENV-SS-1 <input type="checkbox"/>	LED 36W (700mA) 72W (700mA) 108W (700mA) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	120 <input type="checkbox"/>	<input type="checkbox"/> 1.....	<input type="checkbox"/> Dark Bronze	Optical House Side Shield <input type="checkbox"/>
AVPL- ENV-SS-2 <input type="checkbox"/>	56W (1A) 112W (1A) 168W (1A) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	208 <input type="checkbox"/>	<input type="checkbox"/> 2-90.....	<input type="checkbox"/> Black	Electrical 10-20KV Surge Protector <input type="checkbox"/> 0-10V Dimmable Driver(s) <input type="checkbox"/> Photo Cell + Voltage <input type="checkbox"/>
Optics	PSMH 50W 70W 100W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	240 <input type="checkbox"/>	<input type="checkbox"/> 2-180.....	<input type="checkbox"/> White	High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
<input type="checkbox"/> Type III	150W 250W 400W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	277 <input type="checkbox"/>	<input type="checkbox"/> 3-90.....	<input type="checkbox"/> Grey	
<input type="checkbox"/> Type IV	HPS 50W 70W 100W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	MT <input type="checkbox"/>	<input type="checkbox"/> 3-120.....	<input type="checkbox"/> Green	
<input type="checkbox"/> Type V	150W 250W 400W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	120-277 Voltage Sensing <input type="checkbox"/>	<input type="checkbox"/> 4-90.....		
	<input type="checkbox"/> = ENV1 Only	<input type="checkbox"/> = LED Only	<input type="checkbox"/> Wall Mount.....		Color Temp 3000K Warm <input type="checkbox"/> 4000K Natural <input type="checkbox"/> 5000K Cool <input type="checkbox"/> <input type="checkbox"/> = LED Only

AVPL GL - Globe Series

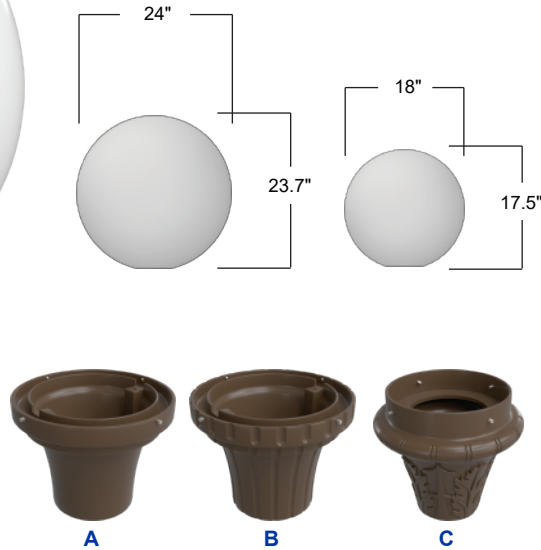

Description

This traditional Globe is an inexpensive solution for a variety of lighting applications. The GL series by AV Poles and Lighting is ideal for commercial, municipal, and design build applications.

Materials

Available with clear smooth or smooth opal lens in either acrylic or polycarbonate construction.

Medium base porcelain socket.

Cast aluminum fitter.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Luminaire	Lamp Type	Volts	Mounting	Finish	Options
AVPL- GL-24 <input type="checkbox"/>	LED 24W (350mA) 36W (350mA) 60W (350mA) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	120 <input type="checkbox"/>		<input type="checkbox"/> Dark Bronze	Optical Clear Smooth Polycarbonate Opal Smooth Polycarbonate <input type="checkbox"/> <input type="checkbox"/> Clear Smooth Acrylic Opal Smooth Acrylic <input type="checkbox"/> <input type="checkbox"/> House Side Shield Internal Louver (Type V) Glass Refractor (Type III,V) <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> Internal Glass Chimney <input type="checkbox"/>
AVPL- GL-18 <input type="checkbox"/>	PSMH 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	208 <input type="checkbox"/>	<input type="checkbox"/> Wall Mount.....	<input type="checkbox"/> Black	
Fitter	HPS 70W 100W 150W <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	240 <input type="checkbox"/>	<input type="checkbox"/> Post Top.....	<input type="checkbox"/> White	
<input type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C	Color Temp 3000K Warm 4000K Natural 5000K Cool <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	277 <input type="checkbox"/>		<input type="checkbox"/> Grey	Electrical 10-20KV Surge Protector 0-10V Dimmable Driver(s) Photo Cell + Voltage <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> High/Low Dimming for Hardwired Switching or Non-Integrated Motion Sensor <input type="checkbox"/>
	<input type="checkbox"/> = LED Only	MT <input type="checkbox"/>		<input type="checkbox"/> Green	
	<input type="checkbox"/> = LED Only	120-277 Voltage Sensing <input type="checkbox"/>			

BRACKETS



AV-A-PM
Page 22



AV-A-PT
Page 23



SS-PM
Page 24



SS-PT
Page 25



DAMA
Page 26




SWA
Page 27




PY-PM
Page 28

BRACKETS

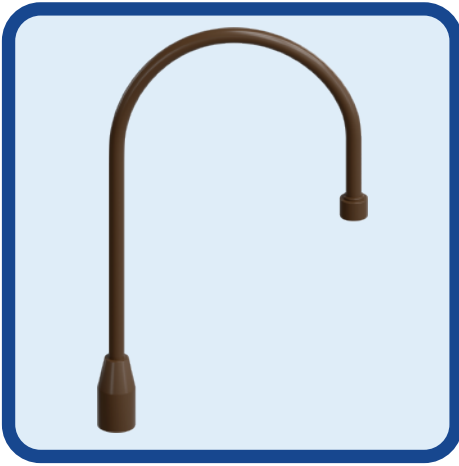

SHA
Page 29

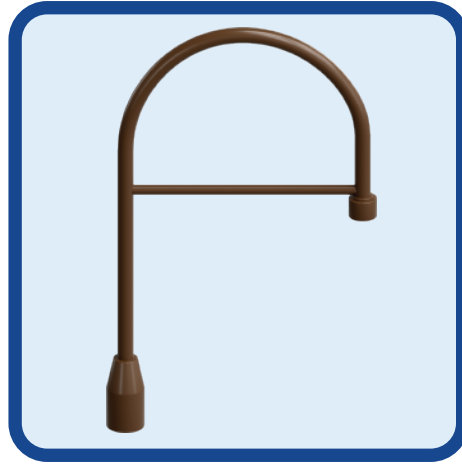

SHA-CS
Page 30



SHA-CB
Page 31



AXL-ROD
Page 32




BXC
Page 33



CSH
Page 34

AVPL AV-A - Pendant Mount Arm

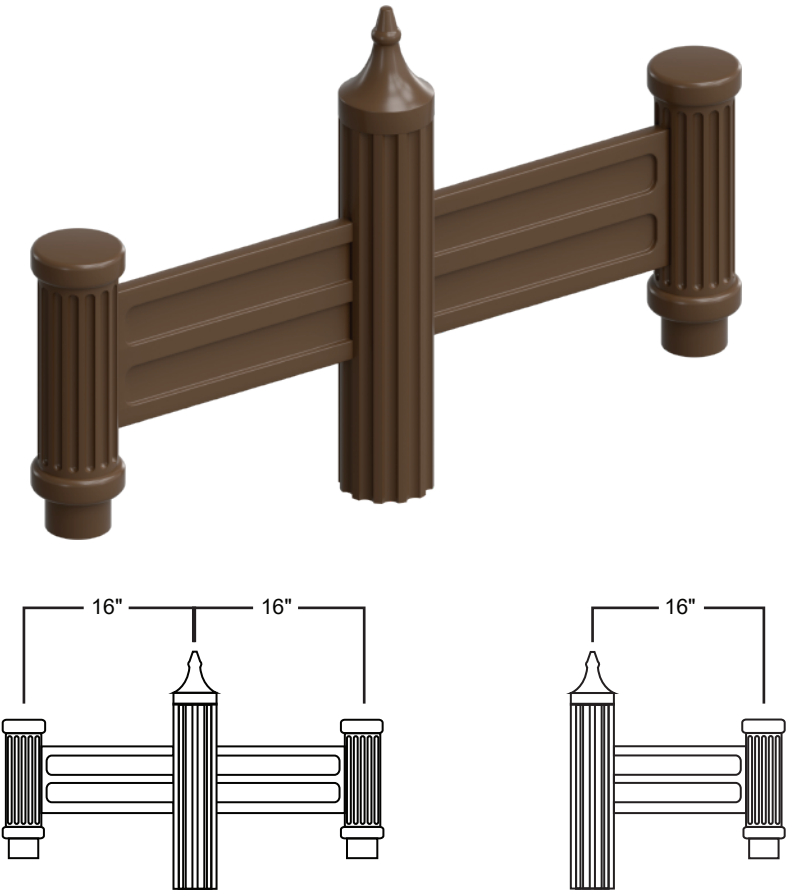

Description

This versatile arm is suited for traditional and contemporary fixtures. The AV-A PM arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials

Decorative cast aluminum and extruded aluminum pole or wall bracket mounting.

Mounts to 2 3/4" or 2 7/8" O.D. tenon.

Extruded aluminum, Schedule 40 wall thickness.









6061 alloy T-6 temper with cast aluminum slip fitter.

Available with CB (Center Straight Bar) or CS (Center Scroll Bar).


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL AV-A PM <input type="checkbox"/>	<input type="checkbox"/> 1..... 	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green
	<input type="checkbox"/> 2-90..... 	
	<input type="checkbox"/> 2-180..... 	
	<input type="checkbox"/> 3-90..... 	
	<input type="checkbox"/> 3-120..... 	
	<input type="checkbox"/> 4-90..... 	
	<input type="checkbox"/> 5-90..... 	
	<input type="checkbox"/> Wall Mount..... 	

AVPL AV-A - Post Top Arm

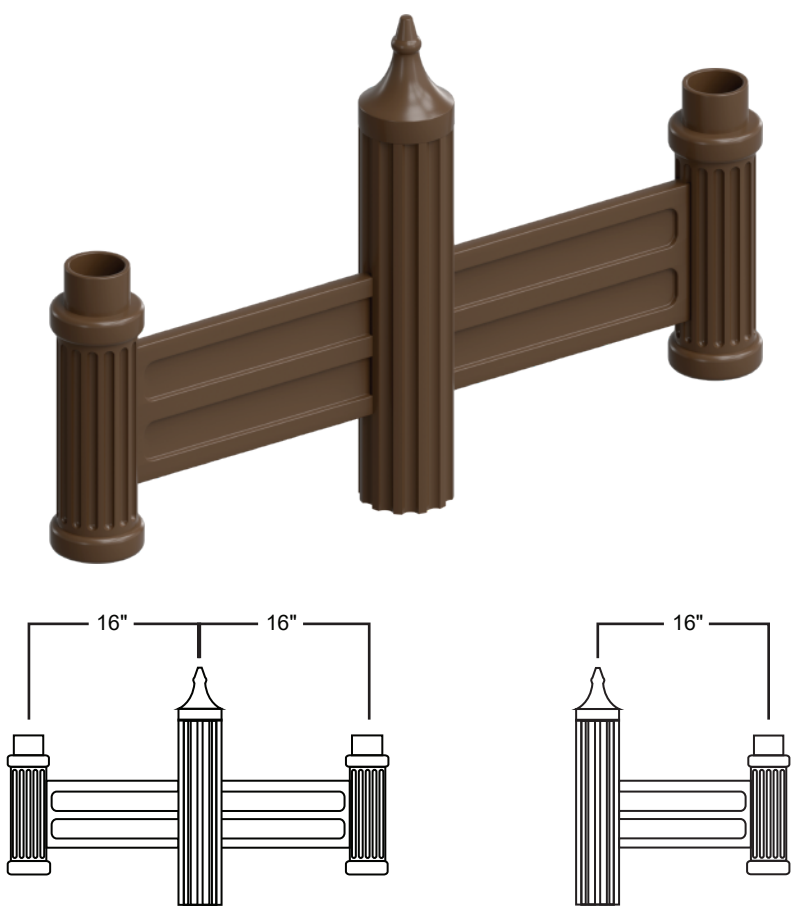

Description

This versatile arm is suited for traditional and contemporary fixtures. The AV-A PT arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials

Decorative cast aluminum and extruded aluminum pole or wall bracket mounting.

Mounts to 2 3/4" or 2 7/8" O.D. tenon.

Extruded aluminum, Schedule 40 wall thickness.









6061 alloy T-6 temper with cast aluminum slip fitter.

Available with CB (Center Straight Bar) or CS (Center Scroll Bar).


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL AV-A PT <input type="checkbox"/>	<input type="checkbox"/> 1..... 	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green
	<input type="checkbox"/> 2-90..... 	
	<input type="checkbox"/> 2-180..... 	
	<input type="checkbox"/> 3-90..... 	
	<input type="checkbox"/> 3-120..... 	
	<input type="checkbox"/> 4-90..... 	
	<input type="checkbox"/> 5-90..... 	
	<input type="checkbox"/> Wall Mount..... 	

AVPL SS-PM - S-Scroll Pendant Mount Arm

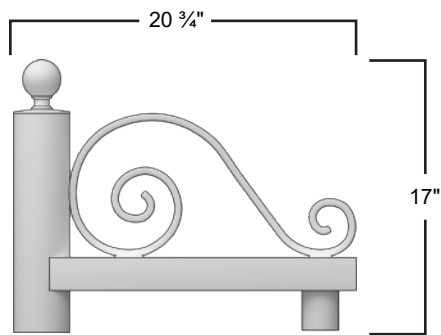

Description

This versatile arm is suited for traditional and contemporary fixtures. The SS-PM arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials

Decorative cast aluminum pendant mount with an elegant S-Scroll on top.

Mounts to 2 3/4" or 2 7/8" O.D. tenon.

Extruded aluminum, Schedule 40 wall thickness.







6061 alloy T-6 temper with cast aluminum slip fitter.

Available with CB (Center Straight Bar) or CS (Center Scroll Bar).


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL SS-PM <input type="checkbox"/>	<input type="checkbox"/> 1..... 	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green
	<input type="checkbox"/> 2-90..... 	
	<input type="checkbox"/> 2-180..... 	
	<input type="checkbox"/> 3-90..... 	
	<input type="checkbox"/> 4-90..... 	
	<input type="checkbox"/> Wall Mount..... 	

AVPL SS-PT - S-Scroll Post Top Arm

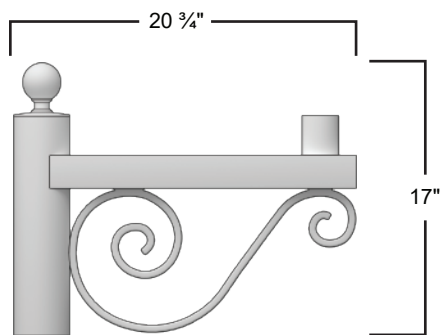

Description

This versatile arm is suited for traditional and contemporary fixtures. The SS-PT arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials

Decorative cast aluminum pendant mount with an elegant S-Scroll on bottom.

Mounts to 2 3/4" or 2 7/8" O.D. tenon.

Extruded aluminum, Schedule 40 wall thickness.







6061 alloy T-6 temper with cast aluminum slip fitter.

Available with CB (Center Straight Bar) or CS (Center Scroll Bar).


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL SS-PT <input type="checkbox"/>	<input type="checkbox"/> 1..... 	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green
	<input type="checkbox"/> 2-90..... 	
	<input type="checkbox"/> 2-180..... 	
	<input type="checkbox"/> 3-90..... 	
	<input type="checkbox"/> 4-90..... 	
	<input type="checkbox"/> Wall Mount..... 	

AVPL DAMA - Decorative Aluminum Mast Arm

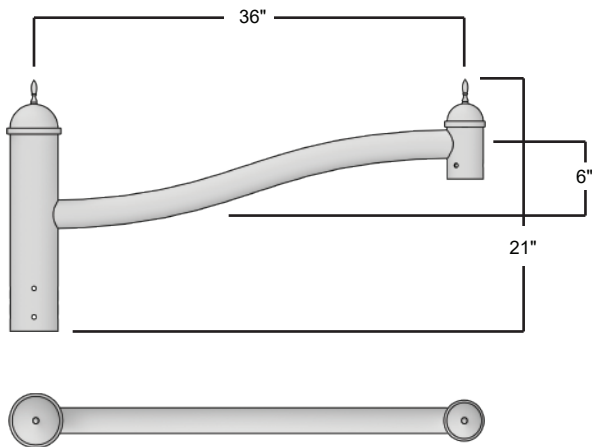

Description

The Decorative Aluminum Mast Arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials

Shall be made from bent 6061-T6 aluminum tubing, 2 3/4" O.D. welded to 4" O.D. aluminum tubing






Mechanically attaches to 3" - 3 1/2" O.D. tenon

Two sets of four 3/8" - 16 S316 screws and provided with one 3/8" - 16 x 4" thru-bolt, field drilling required


Stainless steel hardware

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL - DAMA <input type="checkbox"/>	<input type="checkbox"/> 1..... 	<input type="checkbox"/> Dark Bronze
	<input type="checkbox"/> 2-90..... 	<input type="checkbox"/> Black
	<input type="checkbox"/> 2-180..... 	<input type="checkbox"/> White
	<input type="checkbox"/> 3-90..... 	<input type="checkbox"/> Grey
	<input type="checkbox"/> 4-90..... 	<input type="checkbox"/> Green

AVPL SWA - Sweep Arm

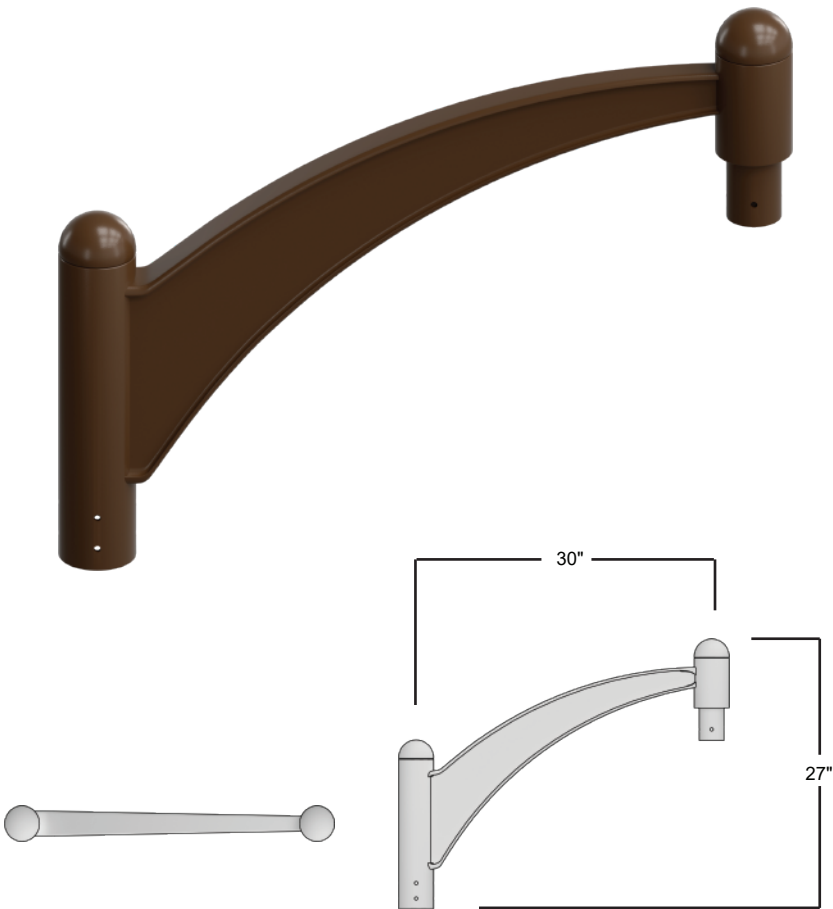

Description

The Sweep Arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials








Mounts to 3" O.D. tenon.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL - SWA <input type="checkbox"/>	<input type="checkbox"/> 1..... 	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green
	<input type="checkbox"/> 2-90..... 	
	<input type="checkbox"/> 2-180..... 	
	<input type="checkbox"/> 3-90..... 	
	<input type="checkbox"/> 3-120..... 	
	<input type="checkbox"/> 4-90..... 	
	<input type="checkbox"/> Wall Mount..... 	

AVPL PY-PM - PY Pendant Mount Arm

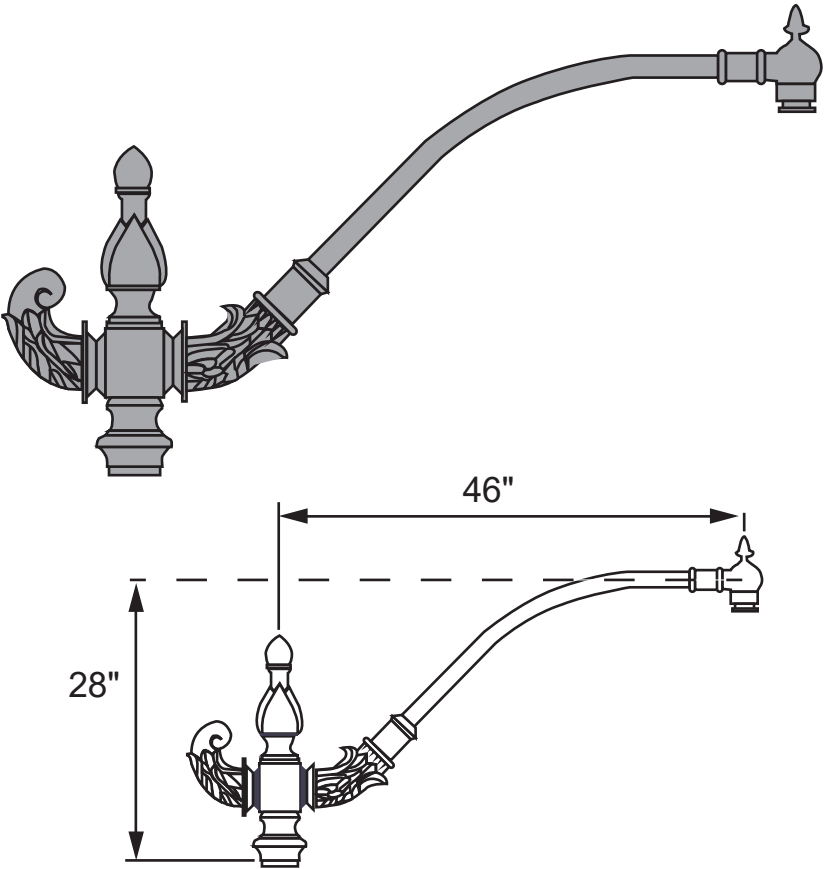

Description

Decorative cast aluminum pendant mount. This versatile decorative arm is ideal for traditional fixtures. The AVPL PY-PM arm works for any commercial, municipality, or design build lighting application.

Materials

Decorative cast and extruded aluminum.


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL PY-PM <input type="checkbox"/>	<input type="checkbox"/> 1.....	<input type="checkbox"/> Dark Bronze
	<input type="checkbox"/> 2-180.....	<input type="checkbox"/> Black
		<input type="checkbox"/> White
		<input type="checkbox"/> Grey
		<input type="checkbox"/> Green

AVPL SHA - Shepherd's Hook Arm

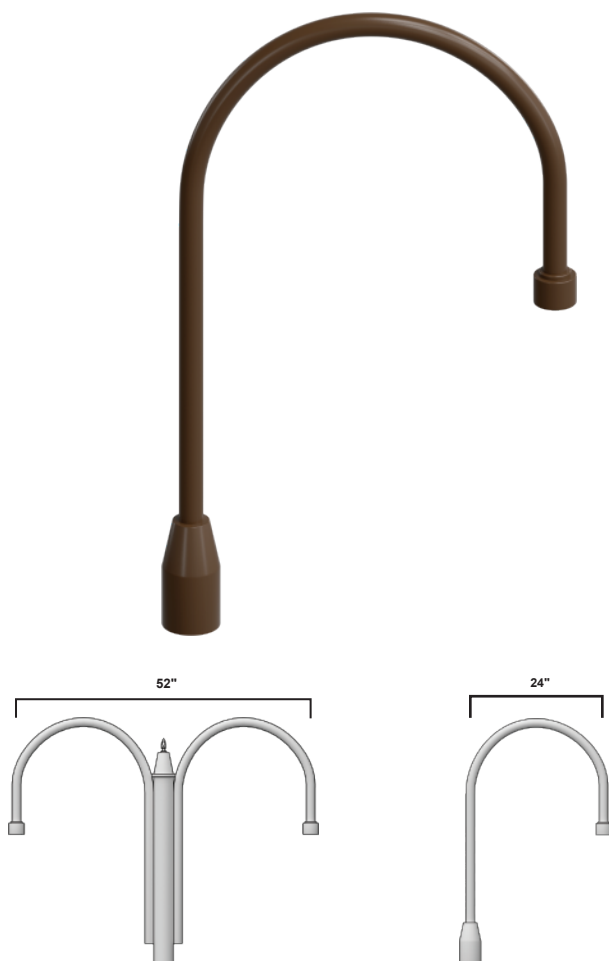

Description

The SHA arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials

Mounts to 3" O.D. tenon

Extruded aluminum, Schedule 40 wall thickness

6061 alloy T-6 temper with cast aluminum slip fitter

Optional CB (Center Straight Bar) or CS (Center Scroll)


Stainless steel hardware

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish	Options
AVPL - SHA <input type="checkbox"/>	<input type="checkbox"/> 1.....	<input type="checkbox"/> Dark Bronze	<input type="checkbox"/> CB- Center Straight Bar <input type="checkbox"/> CS- Center Scroll
	<input type="checkbox"/> 2-90.....	<input type="checkbox"/> Black	
	<input type="checkbox"/> 2-180.....	<input type="checkbox"/> White	
	<input type="checkbox"/> 3-90.....	<input type="checkbox"/> Grey	
	<input type="checkbox"/> 3-120.....	<input type="checkbox"/> Green	
	<input type="checkbox"/> 4-90.....		
	<input type="checkbox"/> Wall Mount.....		

AVPL SHA-CB - Shepherd's Hook Arm Center Bar

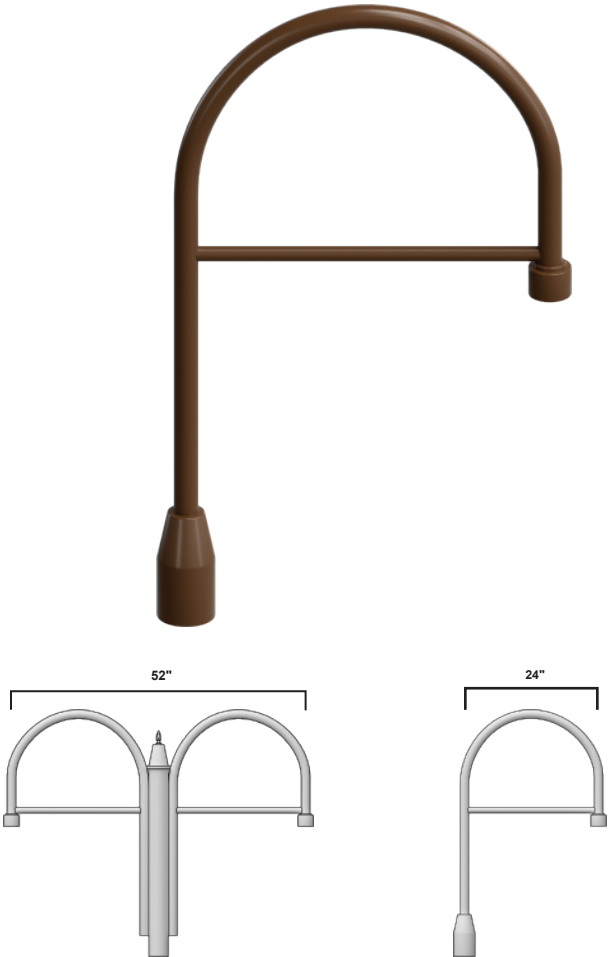

Description

The SHA-CB arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials


- Mounts to 3" O.D. tenon
- Extruded aluminum, Schedule 40 wall thickness
- 6061 alloy T-6 temper with cast aluminum slip fitter
- Center Straight Bar
- Stainless steel hardware

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL - SHA-CB <input type="checkbox"/>	<input type="checkbox"/> 1.....	<input type="checkbox"/> Dark Bronze
	<input type="checkbox"/> 2-90.....	<input type="checkbox"/> Black
	<input type="checkbox"/> 2-180.....	<input type="checkbox"/> White
	<input type="checkbox"/> 3-90.....	<input type="checkbox"/> Grey
	<input type="checkbox"/> 3-120.....	<input type="checkbox"/> Green
	<input type="checkbox"/> 4-90.....	
	<input type="checkbox"/> Wall Mount.....	

AVPL SHA-CS - Shepherd's Hook Arm Center Scroll

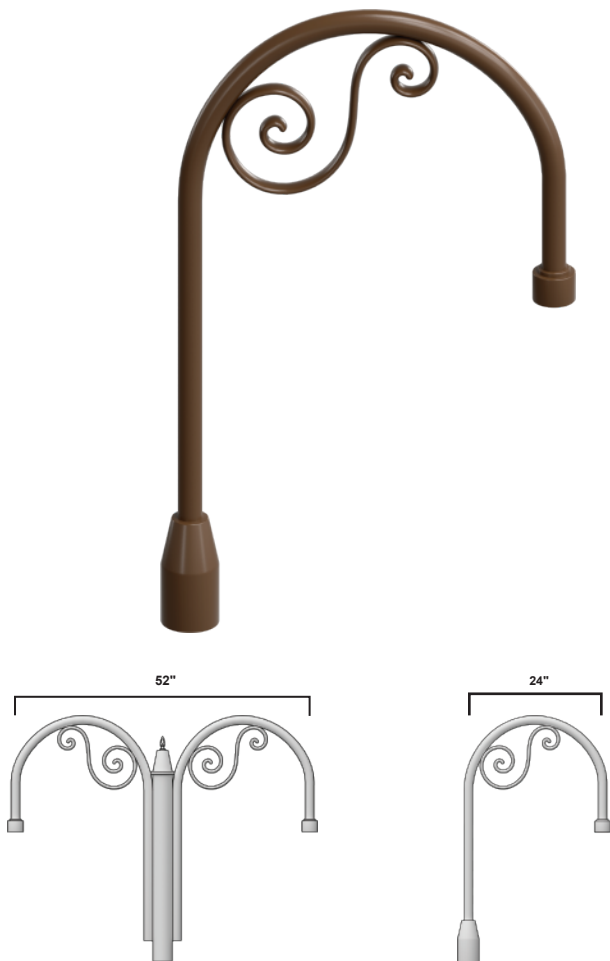

Description








The SHA-CS arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials


- Mounts to 3" O.D. tenon
- Extruded aluminum, Schedule 40 wall thickness
- 6061 alloy T-6 temper with cast aluminum slip fitter
- Center Scroll
- Stainless steel hardware

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL - SHA-CS <input type="checkbox"/>	<input type="checkbox"/> 1..... 	<input type="checkbox"/> Dark Bronze
	<input type="checkbox"/> 2-90..... 	<input type="checkbox"/> Black
	<input type="checkbox"/> 2-180..... 	<input type="checkbox"/> White
	<input type="checkbox"/> 3-90..... 	<input type="checkbox"/> Grey
	<input type="checkbox"/> 3-120..... 	<input type="checkbox"/> Green
	<input type="checkbox"/> 4-90..... 	
	<input type="checkbox"/> Wall Mount..... 	

AVPL AXL-ROD

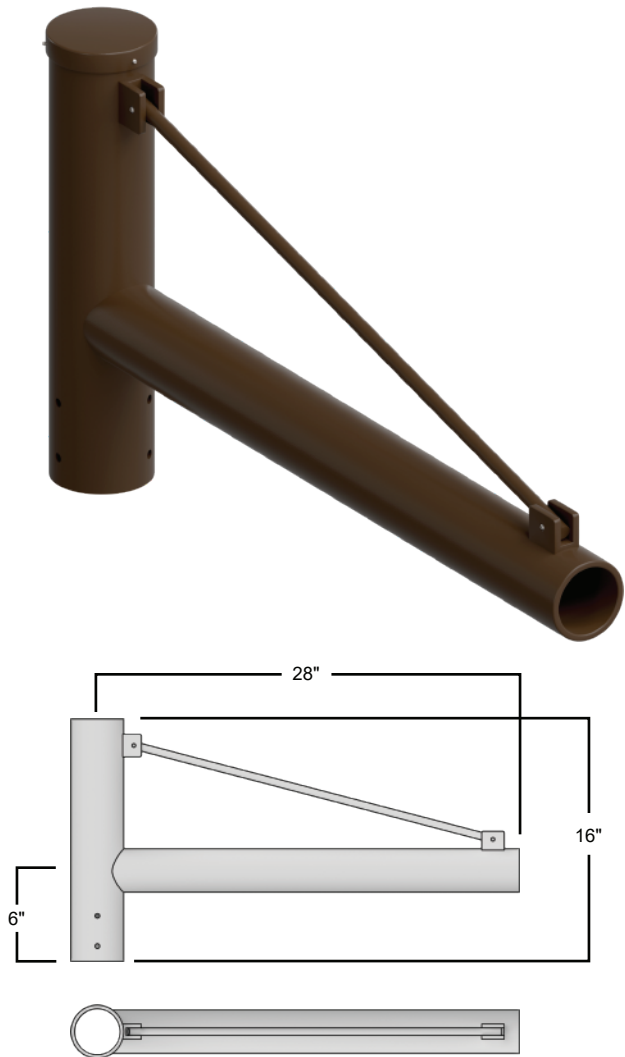

Description

The AXL-Rod Arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications. Mountable on steel or aluminum poles, existing or new.

Materials







Tube arm fabricated from 2 7/8" O.D. A500 grade B structural steel schedule 40 tube.

Center tube fabricated from 3 1/2" O.D. A500 grade B structural steel schedule 40 tube.


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL - AXL-ROD <input type="checkbox"/>	<input type="checkbox"/> 1-90 	<input type="checkbox"/> Dark Bronze <input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Grey <input type="checkbox"/> Green
	<input type="checkbox"/> 2-90..... 	
	<input type="checkbox"/> 2-180..... 	
	<input type="checkbox"/> 3-90..... 	
	<input type="checkbox"/> 3-120..... 	
	<input type="checkbox"/> 4-90..... 	

AVPL BXC - Pendant Mount Arm

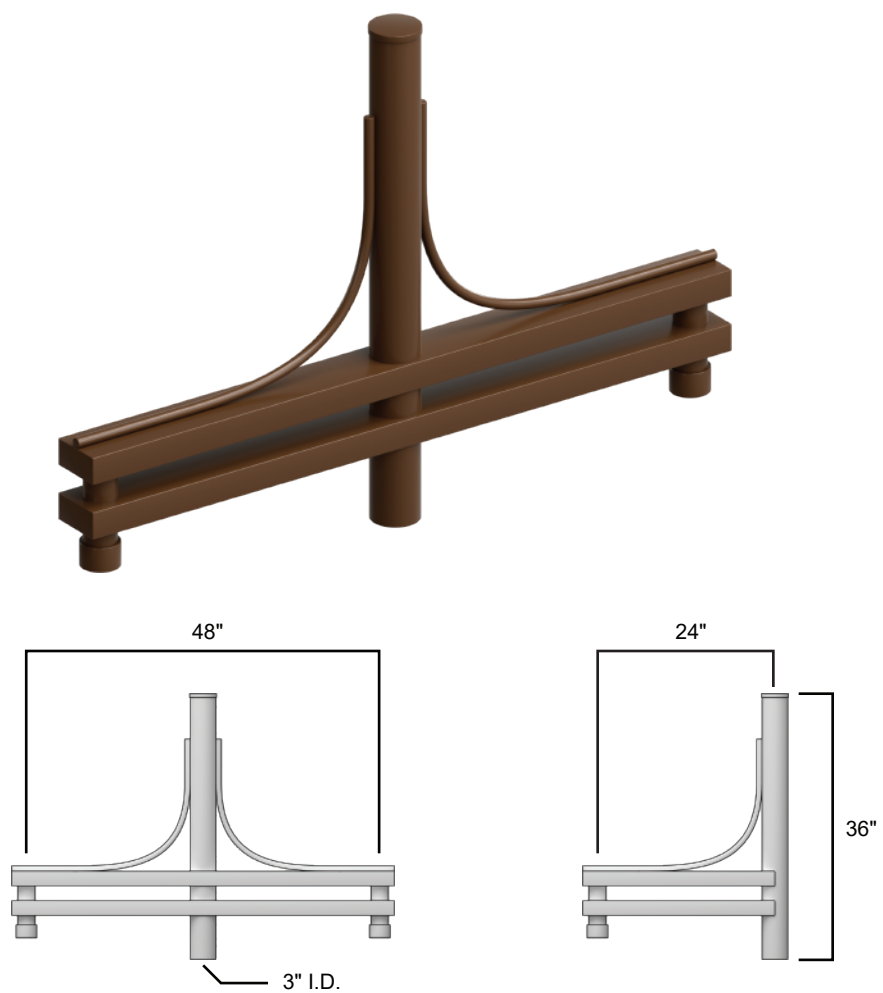

Description

This versatile arm is suited for traditional and contemporary fixtures. The BXC arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials

Decorative cast aluminum and extruded aluminum pole or wall bracket mounting.

Mounts to 2 7/8" O.D. tenon.







Extruded aluminum, Schedule 40 wall thickness.

6061 alloy T-6 temper with cast aluminum slip fitter.


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
AVPL BXC <input type="checkbox"/>	<input type="checkbox"/> 1..... 	<input type="checkbox"/> Dark Bronze
	<input type="checkbox"/> 2-90..... 	<input type="checkbox"/> Black
	<input type="checkbox"/> 2-180..... 	<input type="checkbox"/> White
	<input type="checkbox"/> 3-90..... 	<input type="checkbox"/> Grey
	<input type="checkbox"/> 4-90..... 	<input type="checkbox"/> Green
	<input type="checkbox"/> Wall Mount..... 	

AVPL CSH-1 - Curved Shepherd's Hook Arm

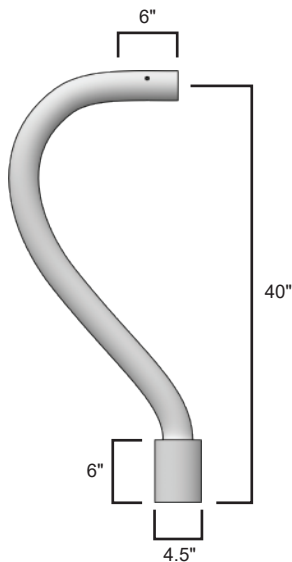

Description

The CSH arm is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials

- Mounts to 4" O.D. tenon.
- Extruded aluminum, 0.125" wall thickness.
- 6061 alloy T-6 temper with cast aluminum slip fitter.
- Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

Ordering Information

Arm	Mounting	Finish
<div>AVPL - CSH</div> <div><input type="checkbox"/></div>	<div><input type="checkbox"/> 1..... 0"</div>	<div><input type="checkbox"/> Dark Bronze</div> <div><input type="checkbox"/> Black</div> <div><input type="checkbox"/> White</div> <div><input type="checkbox"/> Grey</div> <div><input type="checkbox"/> Green</div>

BASES



RON
Page 37



LA-11
Page 38



WH
Page 39



FON
Page 40



LR
Page 41

BASES



FILL
Page 42



FRE
Page 43



MON
Page 44



LAN
Page 45

AVPL RON - Ronson Base (1 piece)

Description

The Ronson Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.


Materials

Mounts to 4", 5", and 6" smooth or fluted round steel or aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

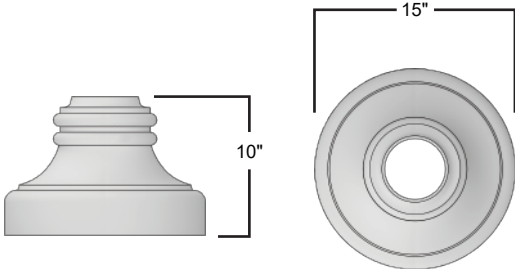

TOP VIEW

Ordering Information

Base	Shaft		Wall	Height		Finish
AVPL- RON <input type="checkbox"/>	4S (smooth) <input type="checkbox"/>	4F (fluted) <input type="checkbox"/>	<input type="checkbox"/> .188	<input type="checkbox"/>	10'	<input type="checkbox"/> Dark Bronze
	5S (smooth) <input type="checkbox"/>	5F (fluted) <input type="checkbox"/>		<input type="checkbox"/>	12'	<input type="checkbox"/> Black
	6S (smooth) <input type="checkbox"/>	6F (fluted) <input type="checkbox"/>		<input type="checkbox"/>	14'	<input type="checkbox"/> White
				<input type="checkbox"/>	16'	<input type="checkbox"/> Grey
						<input type="checkbox"/> Green

AVPL LA - 11 - Los Angeles 11 Base (1 piece)



Description

The Los Angeles 11 Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.


Materials

Mounts to 4" and 5" smooth or fluted .250" aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"

Stainless steel hardware.


TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

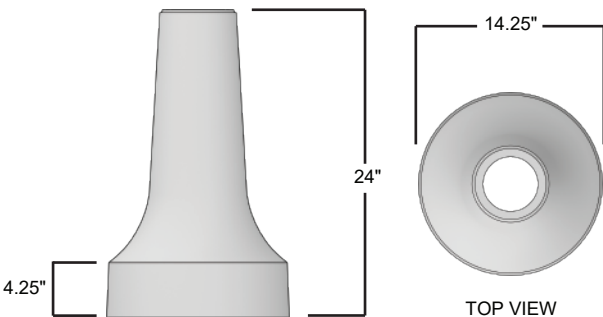

Ordering Information

Base	Shaft	Wall	Height	Finish
AVPL- LA-11 <input type="checkbox"/>	4S (smooth) <input type="checkbox"/>	<input type="checkbox"/> .250	<input type="checkbox"/> 10'	<input type="checkbox"/> Dark Bronze
	4F (fluted) <input type="checkbox"/>		<input type="checkbox"/> 12'	<input type="checkbox"/> Black
	5S (smooth) <input type="checkbox"/>		<input type="checkbox"/> 14'	<input type="checkbox"/> White
	5F (fluted) <input type="checkbox"/>		<input type="checkbox"/> 16'	<input type="checkbox"/> Grey
			<input type="checkbox"/> 18'	<input type="checkbox"/> Green

AVPL WH - West Hollywood Base (1 piece)

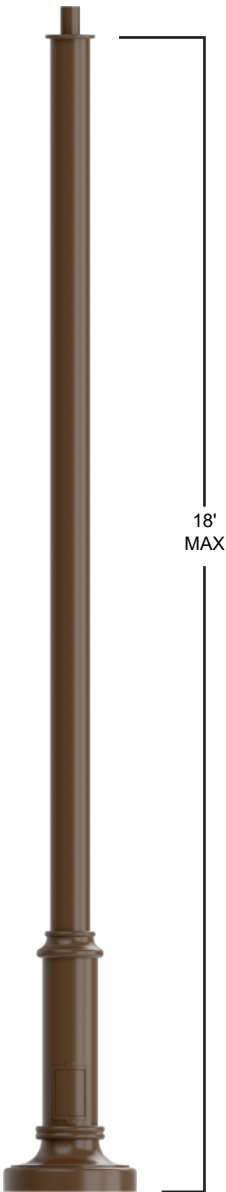

Description

The West Hollywood Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.


Materials

Mounts to 4", 5", and 6" smooth or fluted round steel or aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

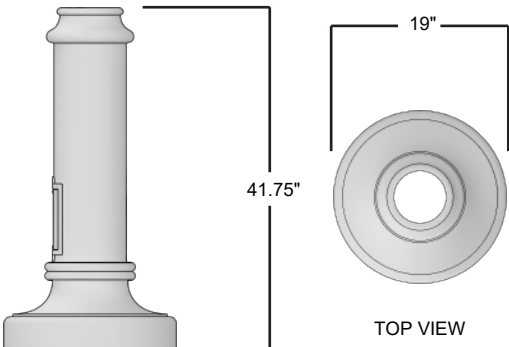

Ordering Information

Base	Shaft		Wall	Height		Finish
<div>AVPL- WH</div> <div><input type="checkbox"/></div>	<div>4S</div> <div>(smooth)</div> <div><input type="checkbox"/></div>	<div>4F</div> <div>(fluted)</div> <div><input type="checkbox"/></div>	<div><input type="checkbox"/> .188</div>	<div><input type="checkbox"/> 10'</div>	<div><input type="checkbox"/> Dark Bronze</div>	
		<div><input type="checkbox"/></div>		<div><input type="checkbox"/> 12'</div>	<div><input type="checkbox"/> Black</div>	
	<div>5S</div> <div>(smooth)</div> <div><input type="checkbox"/></div>	<div>5F</div> <div>(fluted)</div> <div><input type="checkbox"/></div>		<div><input type="checkbox"/> 14'</div>	<div><input type="checkbox"/> White</div>	
	<div>6S</div> <div>(smooth)</div> <div><input type="checkbox"/></div>	<div>6F</div> <div>(fluted)</div> <div><input type="checkbox"/></div>		<div><input type="checkbox"/> 16'</div>	<div><input type="checkbox"/> Grey</div>	
		<div><input type="checkbox"/></div>		<div><input type="checkbox"/> 18'</div>	<div><input type="checkbox"/> Green</div>	

AVPL FON - Fontana Base (1 piece)



Description

The Fontana Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.


Materials

Mounts to 4", 5", and 6" smooth or fluted round steel or aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"

Stainless steel hardware.


TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

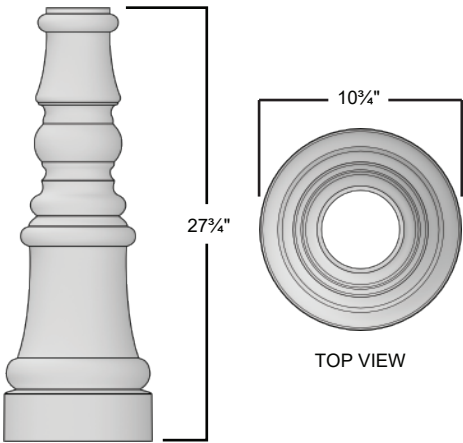

Ordering Information

Base	Shaft		Wall	Height	Finish
AVPL- FON <input type="checkbox"/>	4S (smooth) <input type="checkbox"/>	4F (fluted) <input type="checkbox"/>	<input type="checkbox"/> .188	<input type="checkbox"/> 10'	<input type="checkbox"/> Dark Bronze
				<input type="checkbox"/> 12'	<input type="checkbox"/> Black
	5S (smooth) <input type="checkbox"/>	5F (fluted) <input type="checkbox"/>		<input type="checkbox"/> 14'	<input type="checkbox"/> White
				<input type="checkbox"/> 16'	<input type="checkbox"/> Grey
					<input type="checkbox"/> Green

AVPL LR - Littlerock Base (1 piece)

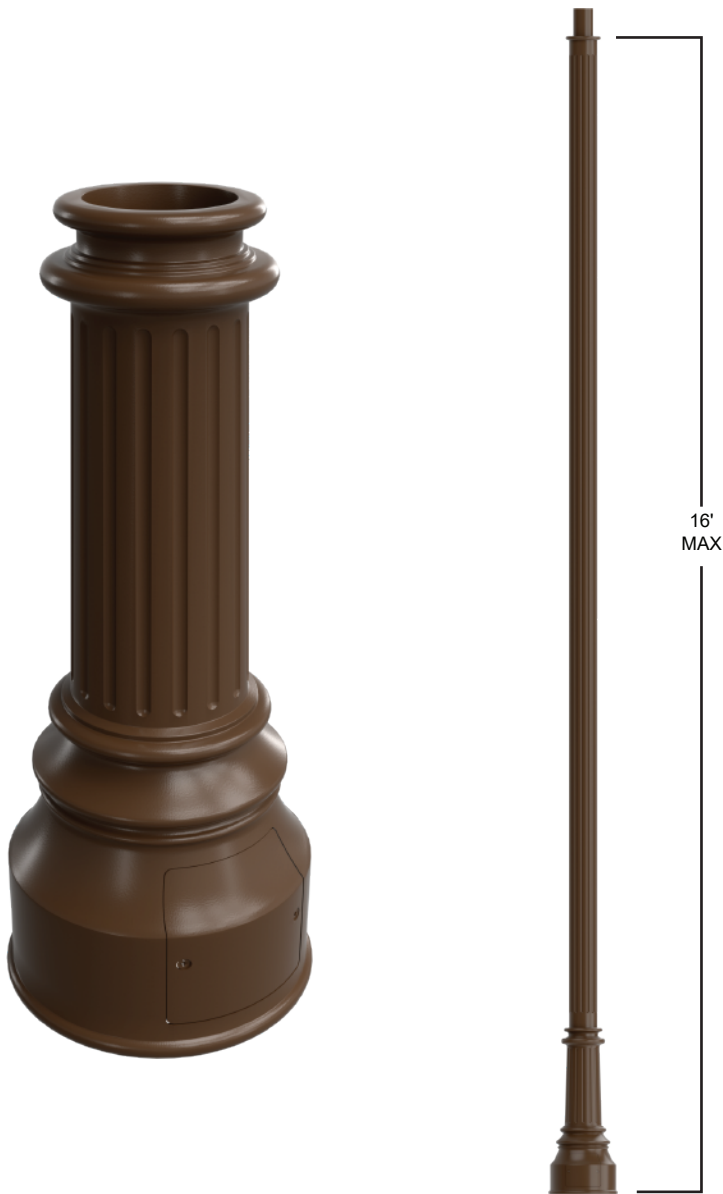

Description

The Littlerock Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.


Materials

Mounts to 4", 5", and 6" smooth or fluted round steel or aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

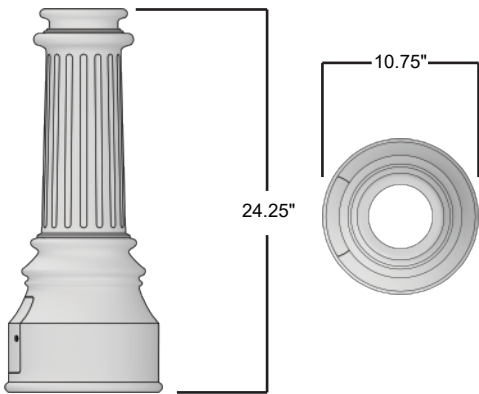

Ordering Information

Base	Shaft		Wall	Height	Finish
AVPL- LR <input type="checkbox"/>	4S (smooth) <input type="checkbox"/>	4F (fluted) <input type="checkbox"/>	<input type="checkbox"/> .125 <input type="checkbox"/> .188	<input type="checkbox"/> 10'	<input type="checkbox"/> Dark Bronze
	5S (smooth) <input type="checkbox"/>	5F (fluted) <input type="checkbox"/>		<input type="checkbox"/> 12'	<input type="checkbox"/> Black
	6S (smooth) <input type="checkbox"/>	6F (fluted) <input type="checkbox"/>		<input type="checkbox"/> 14'	<input type="checkbox"/> White
				<input type="checkbox"/> 16'	<input type="checkbox"/> Grey
					<input type="checkbox"/> Green

AVPL FILL - Fillmore Base (1 piece)



Description

The Fillmore Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.


Materials

Mounts to 4" and 5" smooth or fluted round steel or aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

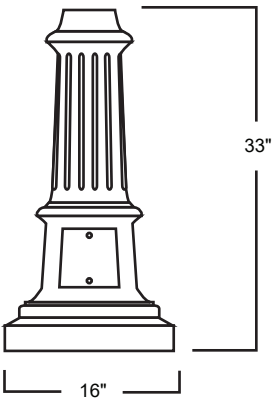

Ordering Information

Base	Shaft		Wall	Height	Finish
<div>AVPL- FILL</div> <div><input type="checkbox"/></div>	4S (smooth)	4F (fluted)	<div><input type="checkbox"/> .188</div>	<div><input type="checkbox"/> 10'</div>	<div><input type="checkbox"/> Dark Bronze</div>
	<div><input type="checkbox"/></div>	<div><input type="checkbox"/></div>		<div><input type="checkbox"/> 12'</div>	<div><input type="checkbox"/> Black</div>
	5S (smooth)	5F (fluted)		<div><input type="checkbox"/> 14'</div>	<div><input type="checkbox"/> White</div>
	<div><input type="checkbox"/></div>	<div><input type="checkbox"/></div>		<div><input type="checkbox"/> 16'</div>	<div><input type="checkbox"/> Grey</div>
				<div><input type="checkbox"/> 18'</div>	<div><input type="checkbox"/> Green</div>

AVPL FRE - Fremont Base (1 piece)



Description

The Fremont Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.


Materials

Mounts to 4" and 5" smooth or fluted round steel or aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"

Stainless steel hardware.


TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

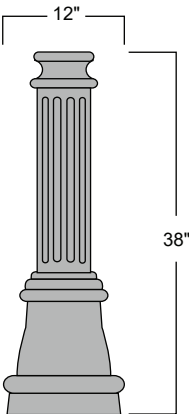

Ordering Information

Base	Shaft	Wall	Height	Finish
AVPL- FRE <input type="checkbox"/>	4S (smooth) <input type="checkbox"/>	<input type="checkbox"/> .188	<input type="checkbox"/> 10'	<input type="checkbox"/> Dark Bronze
	4F (fluted) <input type="checkbox"/>		<input type="checkbox"/> 12'	<input type="checkbox"/> Black
	5S (smooth) <input type="checkbox"/>		<input type="checkbox"/> 14'	<input type="checkbox"/> White
	5F (fluted) <input type="checkbox"/>		<input type="checkbox"/> 16'	<input type="checkbox"/> Grey
			<input type="checkbox"/> 18'	<input type="checkbox"/> Green

AVPL MON - Montana Base (1 piece)

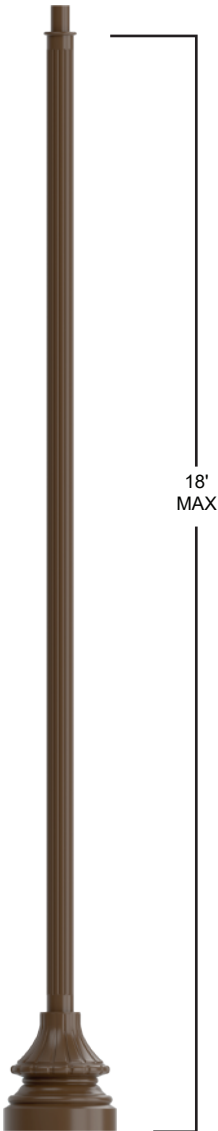

Description

The Montana Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.

Materials


Mounts to 4", 5", and 6" smooth or fluted round steel or aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"


Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

MON




SMON



Ordering Information

Base	Shaft		Wall	Height		Finish
AVPL- MON <div></div>	4S (smooth) <div></div>	4F (fluted) <div></div>	<div></div> .188	<div></div> 10'	<div></div> Dark Bronze	
	5S (smooth) <div></div>	5F (fluted) <div></div>		<div></div> 12'	<div></div> Black	
AVPL- SMON <div></div>	6S (smooth) <div></div>	6F (fluted) <div></div>		<div></div> 14'	<div></div> White	
				<div></div> 16'	<div></div> Grey	
				<div></div> 18'	<div></div> Green	

AVPL LAN - Lancaster Base (1 piece)

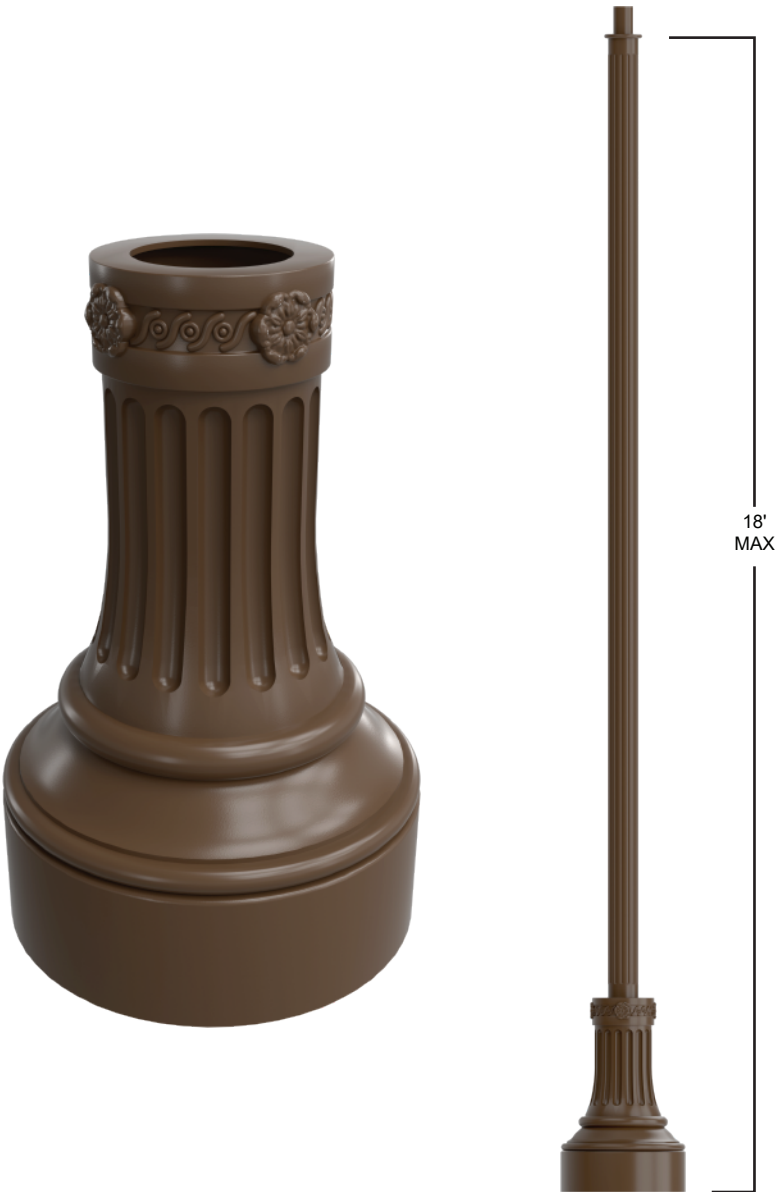

Description

The Lancaster Base is ideal for courtyards, pathways, municipal, and commercial decorative light pole applications.


Materials

Mounts to 4", 5", and 6" smooth or fluted round steel or aluminum shaft.

1 piece corrosion resistant cast aluminum construction with minimum wall thickness of .210"

Stainless steel hardware.

TGIC thermoset polyester powder coat finish is electrostatically applied at a 3.0 mil nominal thickness. A five stage metal pre-treatment process and sealer provide maximum corrosion resistance. The powder top coat is baked in excess of 400 degrees for supreme endurance.

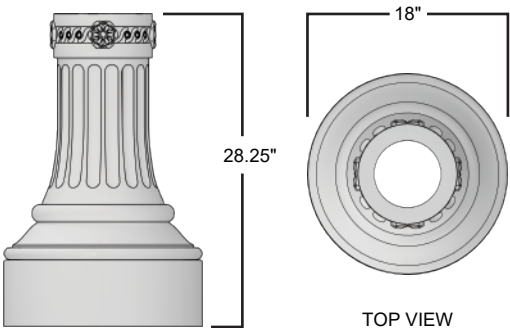

Ordering Information

Base	Shaft		Wall	Height		Finish
AVPL- LAN <div></div>	4S (smooth) <div></div>	4F (fluted) <div></div>	<div></div> .125 <div></div> .188	<div></div> 10'	<div></div> Dark Bronze	
				<div></div> 12'	<div></div> Black	
	5S (smooth) <div></div>	5F (fluted) <div></div>		<div></div> 14'	<div></div> White	
	6S (smooth) <div></div>	6F (fluted) <div></div>		<div></div> 16'	<div></div> Grey	
				<div></div> 18'	<div></div> Green	

MADE IN THE USA

AV Poles & Lighting, steel and aluminum poles and brackets are manufactured in Lancaster, California, U.S.A., and meet the criteria for the Buy American Requirement under Section 1605 of the American Recovery and Reinvestment Act of 2009.

VERTICAL INTEGRATION

Design, engineering, tooling and fabrication all in house

QUICK SHIP MATERIAL

4 inch & 5 inch square steel material in stock for 5 day shipment

ANCHOR BOLTS AND TEMPLATES

In stock for same day shipment

STRUCTURAL CALCULATIONS

For pole assemblies and foundations with engineer's stamp

PROFESSIONAL CAD DRAWINGS

Specifications and approvals

EXTENDED WARRANTIES

1 year standard warranty with 5 & 10 year optional warranties

**AV POLES AND LIGHTING INC.
TERMS AND CONDITIONS OF SALE**

Terms of Payment

Net 30 days from date of shipment (subject to credit approval). A service charge of 2% per month will be made on past due invoices.

Prices

Published prices are subject to change without notice. All orders will be acknowledged by and are subject to acceptance by the company. Hold orders are subject to increase at the time of release unless otherwise agreed upon. Minimum billing is 50.00 net.

All invoices are subject to federal, state, and local taxes. These taxes will be included on the invoice if applicable.

Freight

All shipments are freight on board (FOB) and will be shipped via land transportation at the company discretion. Title passes to consignee on delivery to the carrier. All Claims for loss or damage in transit must be made to the carrier by the consignee. Material will be prepaid and billed to our customer unless otherwise stated. Freight allowed is \$3000.00. Will Call services available.

All pre-shipment of anchor bolts are plus freight.

Restocking Charge

AV Poles and Lighting Inc. reserves the right to assess a minimum restocking charge of 50% of the order value if the order is canceled after it has been processed and has received an Estimated Ship Date.

Returned Goods

Acceptance to return goods must be authorized in writing by AV Poles and Lighting Inc. When material is accepted for return, the purchaser must pay return freight and a minimum re-stocking fee of 25% in addition to any rework to return the goods to saleable condition. All requests for return must be made within 30 days of shipment. The responsibility of the company for defective material is limited solely to the replacement or repair of the material and does not include any incidental or consequential damages which may occur. This would include any labor, repair costs, or transportation charges incurred without prior written authorization from the company.

Cancellation / Change Orders

Cancellation fee of a minimum of 50% applies to all acknowledged and released orders

Change orders will be accepted at n/c 15 days after the acknowledged released order. After 15days 50% change order fee applies.

General: Company reserves the right to change specifications without notice.

Limited Warranty

All company products are carefully tested and inspected before shipment and are warranted to be free of defects in material and workmanship for one (1) year from the date of shipment. Any defective products will be repaired or replaced at the option of the company, provided a written claim is made within the warranty period. Any action by the purchaser under or relating to this agreement or the products sold must be commenced within (1) year after such cause of action has accrued.

Standard Finishes are warranted not to peel, crack, blister or craze from normal atmospheric exposure for one (1) year from shipment date.

Company products have been designed in accordance with 2010 Florida Building Code (FBC). When selecting poles, total effective projected area (EPA) of the luminaires and adaptors must be considered. The total EPA should not exceed the maximum loading value recommended on each pole.

All poles must be installed per the companies' recommendations provided on each pole's cut sheet. Failure to do so will negate the 1 year pole warranty. Any product failure due to poor installation will not be covered by the company.

No warranty expressed or implied exist other than that included above. No person, agent, or distributor is authorized to give any warranty on behalf of the company.



43827 Division St. Lancaster, CA 93535
Toll Free: (844) 770-AVPL Fax: (661) 945-2764
sales@avpltg.com • www.avpolesandlighting.com